



NORTEK
Lighting Lives...

CATALOGUE 2026-27

STORY SUCCESS

Nortek, since its inception in 2014, has emerged as a leading name in the lighting industry, guided by a principle of offering customers the best quality and outstanding service. We have expanded our product range to include over 60 exclusive products, becoming one of India's most trusted and popular light brands. In 2023, we took a significant step forward by introducing a new line of products, including Wires & Cables and PVC Insulated Tapes, further diversifying our offerings. This move was met with great success, strengthening our position in the market and expanding our customer base.

Throughout this journey, Nortek's success story has been woven with determination, passion, and a steadfast commitment to illuminating lives across India. From humble beginnings with just two products, today we celebrate a nationwide presence. With over

**60 distributors and
7000+ dedicated dealers**

forming a robust network, we continue to shine as a beacon of quality and customer satisfaction in the lighting industry.

VISION & MISSION

Nortek's commitment to excellence extends beyond our products; it is ingrained in our customer-centric approach. We understand that each space is unique, and our comprehensive range of lighting solutions caters to diverse requirements, ensuring every customer finds their perfect fit. As a responsible brand, we prioritise sustainability and environmental consciousness, which is reflected in our diverse range of energy-efficient lighting solutions. Our constant endeavor to harness India's natural resources through solar lighting further solidifies our dedication to a greener and brighter future.

With an unwavering vision and a dedicated team, Nortek stands tall as a beacon of innovation, creativity, and reliability in the world of lighting. We continue to evolve, learn and adapt staying true to our mission of illuminating lives and spaces with brilliance, one exceptional lighting experience at a time.

SAMSUNG

Infosys
Navigate your next

WESTIN
HOTELS & RESORTS



vivo



LODHA
BUILDING A BETTER LIFE



oppo



W
GOA



AFFILIATIONS

As a testimony to our commitment to excellence, Nortek proudly holds affiliations with prestigious industry organizations and esteemed partners. These associations reflect our dedication to uphold the highest standards of quality and staying at the forefront of innovation in the lighting sector. We continuously collaborate with like-minded entities to amplify our impact and drive positive change in the lighting industry.



CERTIFICATIONS

At Nortek, we prioritise the safety and satisfaction of our customers. To ensure our products meet the most stringent quality standards, we hold various certifications that underscore our commitment to manufacturing top-notch fixtures such as: (e.g. : BIS, CE, ISO, ROHS, BEE Star, etc). Our certified products provide not just efficient illumination, but also peace of mind, knowing that each fixture has been thoroughly tested and approved for outstanding performance.

CONT

09

COB
DOWNLIGHT

39

COB
SURFACE

49

TRACK
LIGHT

55

MAGNETIC
LIGHT

61

DOWNLIGHT

80

LINEAR LIGHT

87

ROPE
LIGHT

95

STRIP
LIGHT

101

LED
DRIVER

106

SURFACE
PANEL LIGHT

112

PANEL LIGHT

121

BULB &
INVETER

125

LED FAN
LIGHT

127

MIRROR
LIGHT

129

LED BATTEN
LIGHT

135

OUTDOOR
LIGHT

143

SOLAR
LIGHT

148

BOLLARD
LIGHT

155

WALL
LIGHT

164

LED FOOT
LIGHT

167

GARDEN
LIGHT


171

HI-BAY
LIGHT

174

WIRES &
CABLES

01.

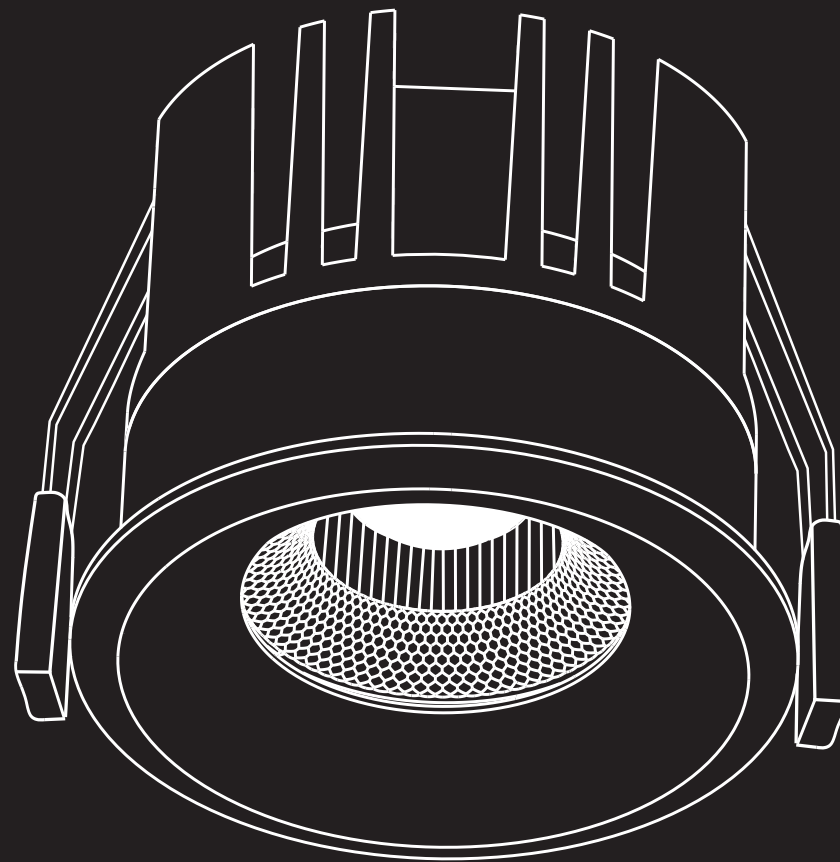

COB DOWNLIGHT



SIYAA

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : Matt White & Matt Black

Light Colours :

4CCT Switch : WW  NW  CW  & 3 in 1

2.4G (Dimmable & Tuneable)

Shapes : Round



Wattages
12W | 20W



Dimensions (mm)
63, 83



Cutouts (mm)
55, 75



Heights (mm)
80, 82

Beam Angle
36 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

Dimmable & Tuneable
2.4G Remote & App Control



CLARA

Twin COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : Matt Black & Matt White




Light Colours :

4CCT Switch : WW  NW  CW  & 3 in 1

2.4G (Dimmable & Tuneable)

Shapes : Rounded Rectangle

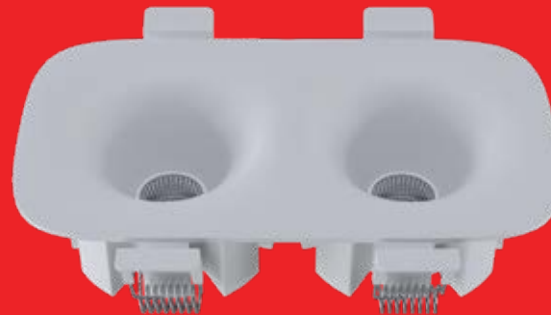

Beam Angle
36 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV


IP Rating
IP20


Led Chip
Bridgelux

Dimmable & Tuneable
2.4G Remote & App Control

 Wattages
18W | 30W

 Dimensions (mm)
122 X 65, 162 X 85

 Cutouts (mm)
113 X 55, 153 X 75

 Heights (mm)
46, 50



SASHA

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : Matt White & Matt Black


Light Colours :

3CCT Switch : WW  NW  CW 


2.4G (Dimmable & Tuneable)

Shapes : Round

 Wattages
9W | 15W

 Dimensions (mm)
60, 70

 Cutouts (mm)
55, 65

 Heights (mm)
76, 86



Beam Angle
36 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

Dimmable & Tuneable
2.4G Remote & App Control

LIANA

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : White, Black & Gun Metal




Light Colours :

4CCT Switch : WW  NW  CW  & 3 in 1

2.4G (Dimmable & Tuneable)

Shapes : Round

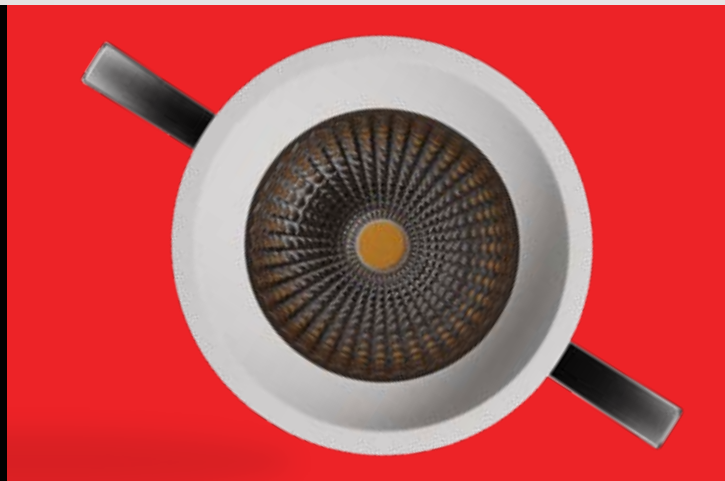

Beam Angle
36 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

Dimmable & Tuneable
2.4G Remote & App Control



Wattages
12W | 18W



Dimensions (mm)
45, 55



Cutouts (mm)
38, 48



Heights (mm)
98, 98



VATICA

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : Matt White & Matt Black

Light Colours :

3CCT Switch : WW  NW  CW 

2.4G (Dimmable & Tuneable)

Shapes : Round



Wattages
12W | 18W



Dimensions (mm)
61, 74



Cutouts (mm)
55, 75



Height (mm)
104, 105

Beam Angle
36 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

Dimmable & Tuneable
2.4G Remote & App Control

VATICA

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : Matt Black & Matt White



Plus


Pro

Light Colours :

3CCT Switch : WW  NW  CW 

2.4G (Dimmable & Tuneable)

Shapes : Round

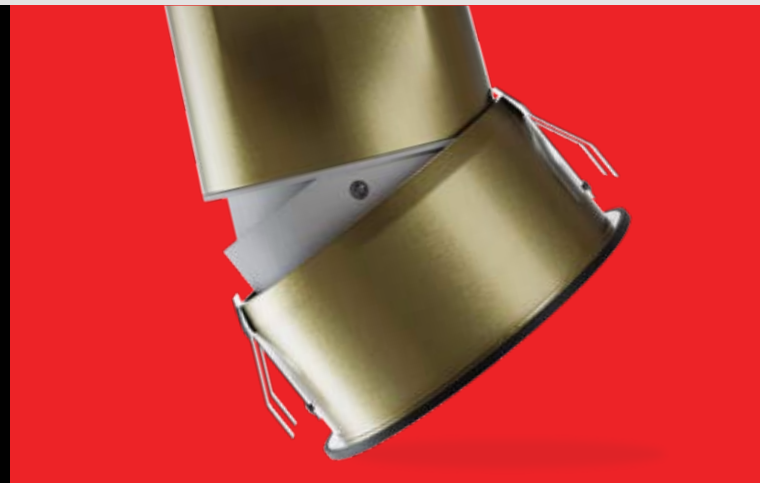

Beam Angle
36 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV


Led Chip
Bridgelux


IP Rating
IP20


Dimmable & Tuneable
2.4G Remote & app control

Tiltable
Yes (Pro)

 Wattages
12W | 18W

 Dimensions (mm)
61, 74

 Cutouts (mm)
55, 75

 Heights (mm)
104, 105



PERINIA

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : Black, White & Gun Metal



Wattages
9W | 15W | 20W



Dimensions (mm)
65, 75, 90



Cutouts (mm)
60, 70, 85



Heights (mm)
46, 55, 57

Light Colours :

3 CCT Switch : WW  NW  CW 

2.4G (Dimmable & Tuneable)

Shapes : Round



Beam Angle
36 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

Dimmable & Tuneable
2.4G Remote & App Control



TIARA

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : Matt Black & Matt White



Light Colours :

3CCT Switch : WW  NW  CW 

2.4G (Dimmable & Tuneable)

Shapes : Round



Wattages
9W | 16W



Cutouts (mm)
45, 65



Dimensions (mm)
52, 73



Heights (mm)
56, 66

Beam Angle
24 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

Dimmable & Tuneable
2.4G Remote & App Control

ELARA

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : Black & White



Wattages
12W



Dimensions (mm)
90



Cutouts (mm)
75



Heights (mm)
95

Light Colours :

3CCT Switch : WW  NW  CW 

2.4G (Dimmable & Tuneable)

Shapes : Round



Beam Angle
24 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

Dimmable & Tuneable
2.4G Remote & App Control

Tiltable
Yes

WAMIQA

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : White & Black



Light Colours :

4CCT Switch : WW  NW  CW  & 3 in 1

2.4G (Dimmable & Tuneable)

Shapes : Round

Reflector : Rose Gold, Matt Black & White



Beam Angle
36 Degree

CRI
> 90

PF
0.9PF

Lumens/Watt
110 Lm/w




Surge Protection
2.5 kV


IP Rating
IP20

Led Chip
Bridgelux

Switch Tuneable
Yes

Dimmable & Tuneable
2.4G Remote & App Control



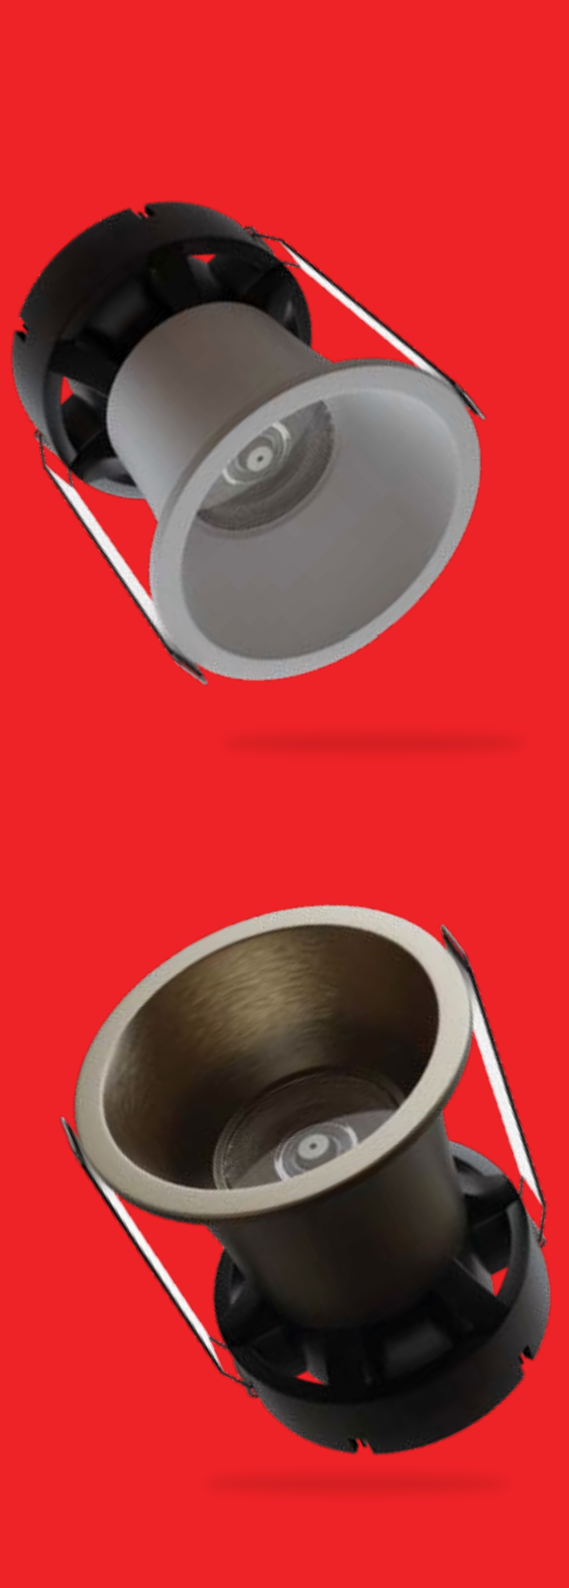

VIONA

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : Bronze & White



Wattages
10W | 15W | 20W



Dimensions (mm)
70, 80, 90



Cutouts (mm)
65, 75, 85



Height (mm)
61, 70, 80

Beam Angle
36 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

Dimmable & Tuneable
2.4G Remote & App Control

Light Colours :

3CCT Switch : WW  NW  CW 

2.4G (Dimmable & Tuneable)

Shapes : Round



PRIMA+

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : White & Black

Light Colours :

WW  NW  CW 

3CCT Switch (WW, NW, CW)

3 in 1 (WW, NW, CW)

2.4G (Dimmable & Tuneable)

Shapes : Round

Reflectors :

Matt White, Glossy White,
Gun Black & Rose Gold

Microprismatic Reflectors :
Black & Rose Gold



Wattages
7W | 12W | 18W



Dimensions (mm)
70, 85, 95



Cutouts (mm)
65, 80, 90



Heights (mm)
50, 65, 75

Beam Angle
24 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

Dimmable & Tuneable
2.4G Remote & App Control

Switch Tuneable
Yes



GIANA

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : Gun Metal



Light Colours :


WW  NW  CW 

3CCT Switch (WW, NW, CW)

2.4G (Dimmable & Tuneable)

Shapes : Round

Reflectors : Gun Metal & Rose Gold

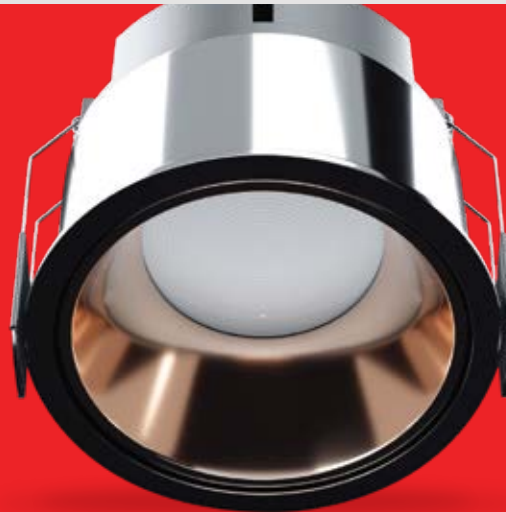

Beam Angle
40 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

Dimmable & Tuneable
2.4G Remote & App Control



Wattages
8W | 15W | 20W



Dimensions (mm)
67, 79, 92



Cutouts (mm)
63, 68, 84



Heights (mm)
50, 58, 66



NAYSA

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : Black



Wattages
12W + 8W



Dimensions (mm)
82



Cutouts (mm)
63



Heights (mm)
80

Light Colours :

WW  NW  CW 

Shapes : Round

Beam Angle
40 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux



YESHA

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : Black & White



Light Colours :

WW  NW  CW 

2.4G (Dimmable & Tuneable)

Shapes : Round



Beam Angle
40 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

Dimmable & Tuneable
2.4G Remote & App Control



Wattages
7W | 12W | 18W



Dimensions (mm)
63, 83, 95



Cutouts (mm)
55, 72, 85



Heights (mm)
60, 77, 97



KRETA+

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : White & Black



Wattages
9W | 15W



Dimensions (mm)
85, 98



Cutouts (mm)
68, 91



Height (mm)
52, 60

Beam Angle
40 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w




Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

Tiltable
Yes

Light Colours :

WW  NW  CW 

Shapes : Round

Reflectors :

Gun Black, Champagne Gold,
Rose Gold, Matt White & Matt Black



KRIDHA

COB Downlight

Construction Material : Polycarbonate
Body Colour : Black

Light Colours :

WW  NW  CW 

Red  Green  Blue  Pink 

Shapes : Round

Reflectors : Gun Black



Wattages
6W



Dimensions (mm)
110



Cutouts (mm)
75



Height (mm)
46



Beam Angle
40 Degree

CRI
>90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

EVANA

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : White



Wattages
6W | 9W | 16W | 24W | 30W | 40W



Dimensions (mm)
78, 78, 97, 122, 122, 145






Cutouts (mm)
53, 68, 91, 117, 117, 137



Heights (mm)
60, 65, 70, 77, 77, 87

Light Colours :

WW  NW  CW 

Shapes : Round



Beam Angle
40 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

Tiltable
Yes





SPECTRA

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : White

Light Colours :

WW  NW  CW 

Shapes : Round



Wattages
3W | 6W | 9W



Dimensions (mm)
68, 86, 100



Cutouts (mm)
55, 75, 89



Height (mm)
26, 26, 26

Beam Angle
40 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

Tiltable
Yes



ZAMINA

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : White & Black



Wattages
3W



Dimensions (mm)
41



Cutouts (mm)
33



Heights (mm)
30

Light Colours :

WW  NW 

Shapes : Round

Reflector : White & Black



Beam Angle
36 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux



KRETA

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : White & Black



Wattages
3W



Dimensions (mm)
32



Cutouts (mm)
24



Height (mm)
30

Beam Angle
36 Degree

Lumens/Watt
110 Lm/w

PF
0.9 PF

IP Rating
IP20

Surge Protection
2.5 kV

Led Chip
Bridgelux

Light Colours :

WW  NW 

Shapes : Round





Reflector : Rose Gold



PRIMA+

COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : White & Black

-  Wattages
3W
-  Dimensions (mm)
38
-  Cutouts (mm)
28
-  Heights (mm)
30

Light Colours :

WW  NW 

Shapes : Round



Beam Angle
40 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

PRIMA




COB Downlight

Construction Material : Aluminium Die Cast
Body Colour : White, Black & Wooden



Light Colours :

WW  NW  CW 

Red  Green  Blue 

Pink  Amber 

Shapes : Round



Beam Angle
36 Degree

CRI
> 90



PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV


IP Rating
IP20

Led Chip
Bridgelux






 Wattages
3W

 Dimensions (mm)
75

 Cutouts (mm)
45

 Height (mm)
26

Beam Angle
40 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV




IP Rating
IP20

Led Chip
Bridgelux

Switch Tuneable
Yes

Light Colours :

WW  NW  CW 

Red  Green  Blue 

Pink 

3 in 1 (WW, NW, CW)

3 in 1 (R, B, PK)

Shapes : Round



YAAMA+

COB Downlight

Construction Material : Polycarbonate
Body Colour : White



EVANA

COB Downlight

Construction Material : Polycarbonate
Body Colour : White



Wattages
3W



Dimensions (mm)
71



Cutouts (mm)
38



Heights (mm)
36

Light Colours :

WW  NW  CW 

Red  Green  Blue  Pink 

3 in 1 (WW, NW, CW)

3 in 1 (R, B, PK)

Shapes : Round



Beam Angle
40 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

Switch Tuneable
Yes



KRIDHA

COB Downlight

Construction Material : Polycarbonate
Body Colour : Black & White


Light Colours :

WW  NW  CW 


Shapes : Round

Reflectors : Rose Gold

 Wattages
3W

 Dimensions (mm)
75

 Cutouts (mm)
45

 Height (mm)
36

Beam Angle
40 Degree

CRI
> 90


PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

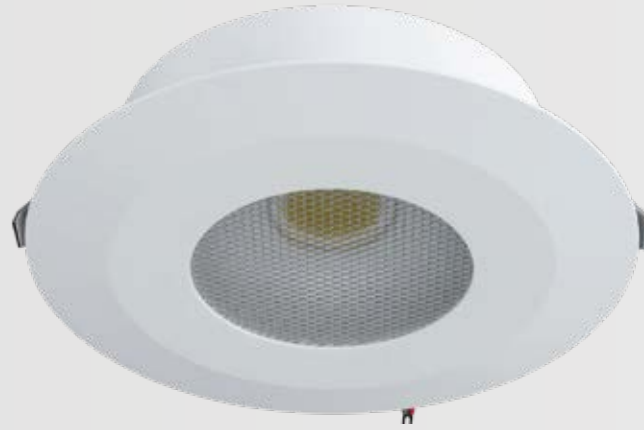




SHAYA


COB Downlight

Construction Material : Polycarbonate
Body Colour : White

Light Colours :


WW  NW  CW 


Red  Green  Blue 


Pink 

Shapes : Round

 Wattages
2W

 Dimensions (mm)
40

 Heights (mm)
12

 Cutouts (mm)
28



Beam Angle
40 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

IMPERIA+

COB Downlight

Construction Material : Polycarbonate
Body Colour : White



Light Colours :

WW  NW  CW 

Red  Green  Blue  Pink 

Shapes : Round



Beam Angle
40 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux



Wattages
6W



Dimensions (mm)
110



Cutouts (mm)
63



Heights (mm)
45








KRISTA

COB Downlight

Construction Material : Polycarbonate
Body Colour : White

Light Colours :

WW  NW  CW 
Red  Green  Blue 
Pink 

Shapes : Round



Wattages
3W | 5W



Dimensions (mm)
75, 110



Cutouts (mm)
55, 75



Height (mm)
43, 60

Beam Angle
40 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w


Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

Tiltable
Yes

02.

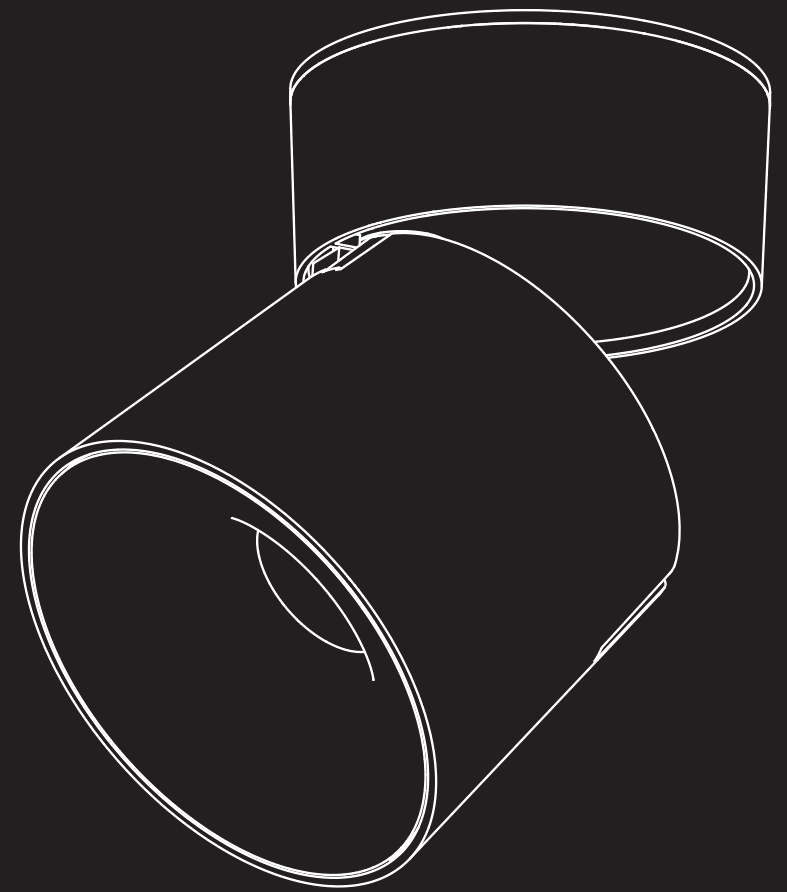

COB SURFACE

PERSIA

COB Surface

Construction Material : Aluminium Die Cast
Body Colour : Rose Pink & Matt Brown



Wattages
12W



Dimensions (mm)
75




Heights (mm)
80

Light Colours :

WW  NW 

Shapes : Round

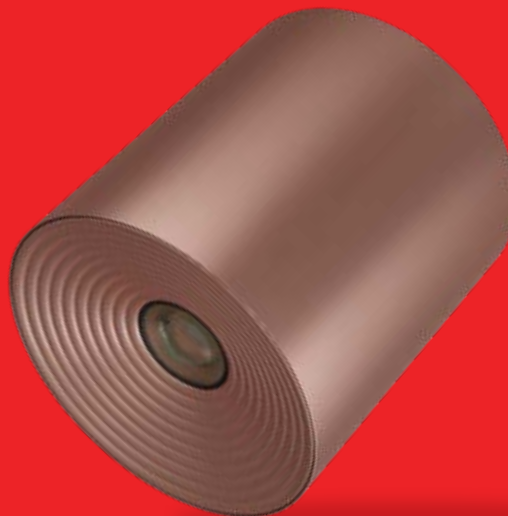

Beam Angle
40 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

CELIA

COB Surface


Construction Material : Aluminium Die Cast
Body Colour : Gun Black & Rose Gold



Light Colours :

WW  NW 

Shapes : Round

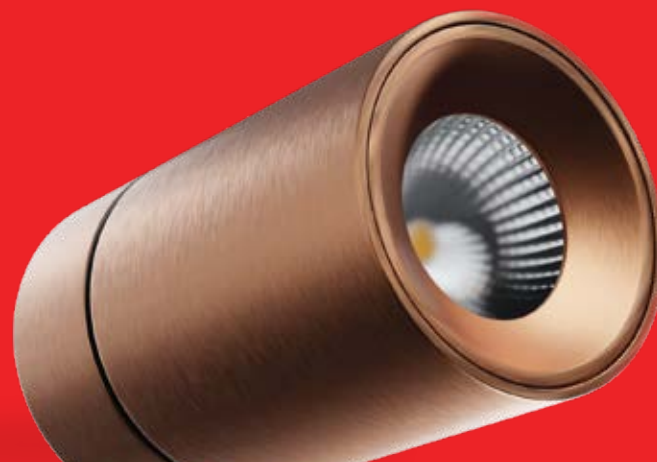

Beam Angle
40 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
CREE

Tiltable
Yes



Wattages
12W



Dimensions (mm)
63



Heights (mm)
106



OPERA

COB Surface

Construction Material : Aluminium Die Cast
Body Colour : Black

Light Colours :

WW  NW  CW 

3CCT Switch (WW, NW, CW)

Shapes : Round

Reflector : Gun Metal & Rose Gold



Wattages
6W | 14W



Dimensions (mm)
46, 74



Height (mm)
75, 75

Beam Angle
40 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
CREE



Wattages
12W



Dimensions (mm)
78



Height (mm)
95

Beam Angle
36 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

Tiltable
Yes

FREYA

COB Surface

Construction Material : Aluminium Die Cast
Body Colour : Black

Light Colours :

WW  NW 

Shapes : Round

Reflector :
Gun Black & Rose Gold

Micro Prismatic Reflector :
Gun Black & Rose Gold





PLATINA+

COB Surface

Construction Material : Aluminium Die Cast
Body Colour : White & Black

Beam Angle
40 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux



Wattages
7W | 12W



Height (mm)
60, 67



Dimensions (mm)
56, 71

Light Colours :

WW

NW

Shapes : Round

Reflector : Gun Metal & Rose Gold



PLATINA

COB Surface

Construction Material : Aluminium Die Cast
Body Colour : Black



Wattages
12W | 18W



Dimensions (mm)
74, 88



Heights (mm)
110, 110

Light Colours :

WW  NW 

Shapes : Round

Reflector : Black & Rose Gold

Beam Angle
36 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20


Led Chip
Bridgelux



PLATINA+

COB Surface

Construction Material : Aluminium Die Cast
Body Colour : Black

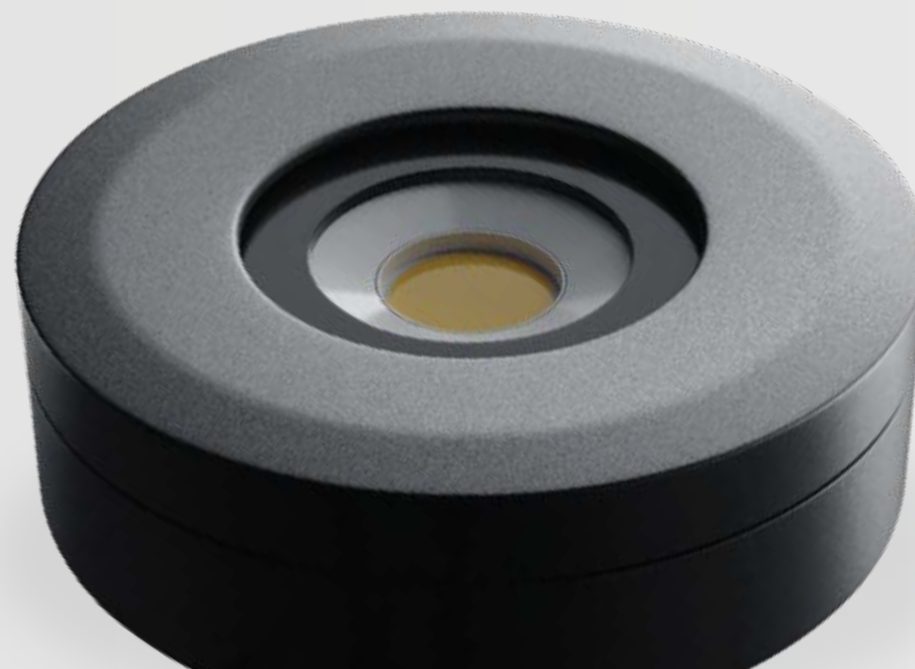

Light Colours :

WW  NW  CW 

Shapes : Round



Beam Angle
40 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP66

Led Chip
Bridgelux



Wattages
5W



Dimensions (mm)
61






Heights (mm)
15



Light Colours :

WW  NW  CW 

Red  Green  Blue 

Pink 

Shapes : Round



Wattages
4W



Dimensions (mm)
75



Height (mm)
16



PLATINA

COB Surface

Construction Material : Aluminium Die Cast
Body Colour : White

Beam Angle
40 Degree

CRI
>90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

SERENA

COB Surface

Construction Material : Aluminium Die Cast
Body Colour : White & Black



Wattages
3W



Dimensions (mm)
30



Heights (mm)
45

Light Colours :

WW  NW  CW 

Shapes : Round

Reflector : Rose Gold



Beam Angle
36 Degree

CRI
> 90

PF
0.9 PF


Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

03.

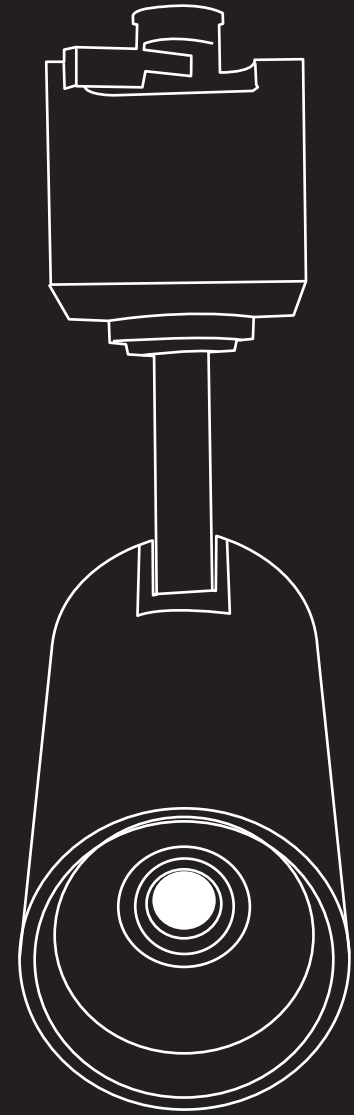

TRACK LIGHT



DAINA

Track Lightt

Construction Material : Aluminium Die Cast
Body Colour : Black & White



Wattages
10W | 20W | 30W



Dimensions (mm)
55, 73, 73



Base Length (mm)
115, 130, 155



Product Length (mm)
171, 187, 212

Beam Angle
36 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

Tiltable
Yes

Light Colours :

3CCT Switch : WW  NW  CW 

2.4G (Dimmable & Tuneable)

Shapes : Round

Reflectors :
Black, White, Rose Gold & Gun Black



Light Colours :

WW  NW  CW 

Shapes : Round



Wattages
10W | 20W | 30W



Dimensions (mm)
57, 70, 80



Base Length (mm)
83, 120, 158



Product Length (mm)
152, 165, 173

DELLA

Track Light

Construction Material : Aluminium Die Cast
Body Colour : White & Black

Beam Angle
36 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

Tiltable
Yes



DELLA+

Track Light

Construction Material : Aluminium Die Cast
Body Colour : Black



Light Colours :

WW  NW  CW 

Round



Beam Angle
36 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

Tiltable
Yes



Wattages
20W | 30W | 40W



Dimensions (mm)
47, 60, 75



Base Length (mm)
85, 95, 110







Product Length (mm)
119, 152, 190



BELLA

Track Light

Construction Material : Aluminium Die Cast
Body Colour : Black

	Wattages 20W
	Length (mm) 490
	Wide (mm) 33
	Heights (mm) 48

Light Colours :

WW  NW  CW 

Beam Angle
120 Degree

CRI
>90

PF
0.9 PF


Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

Tiltable
Yes

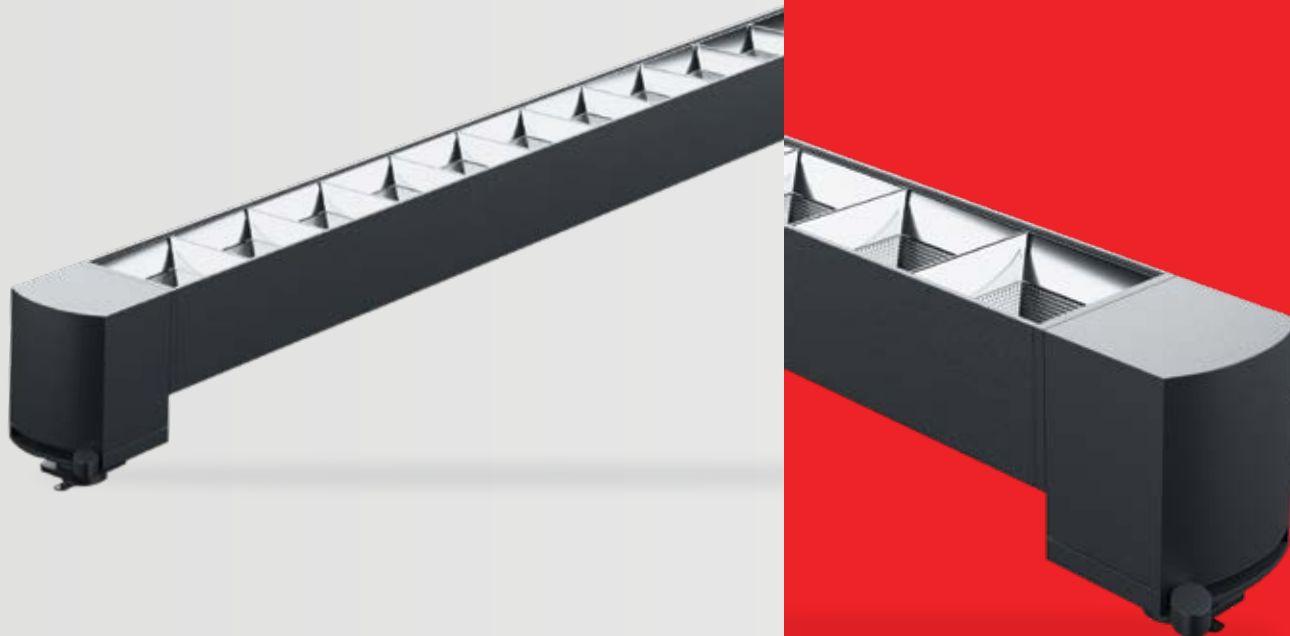

BELLA+

Track Light

Construction Material : Aluminium Die Cast
Body Colour : Black



Wattages
12W | 26W



Length (mm)
280, 478



Wide (mm)
33, 33



Height (mm)
48, 48

Beam Angle
120 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20


Led Chip
Bridgelux

Tiltable
Yes

Light Colours :

WW  NW  CW 

04.

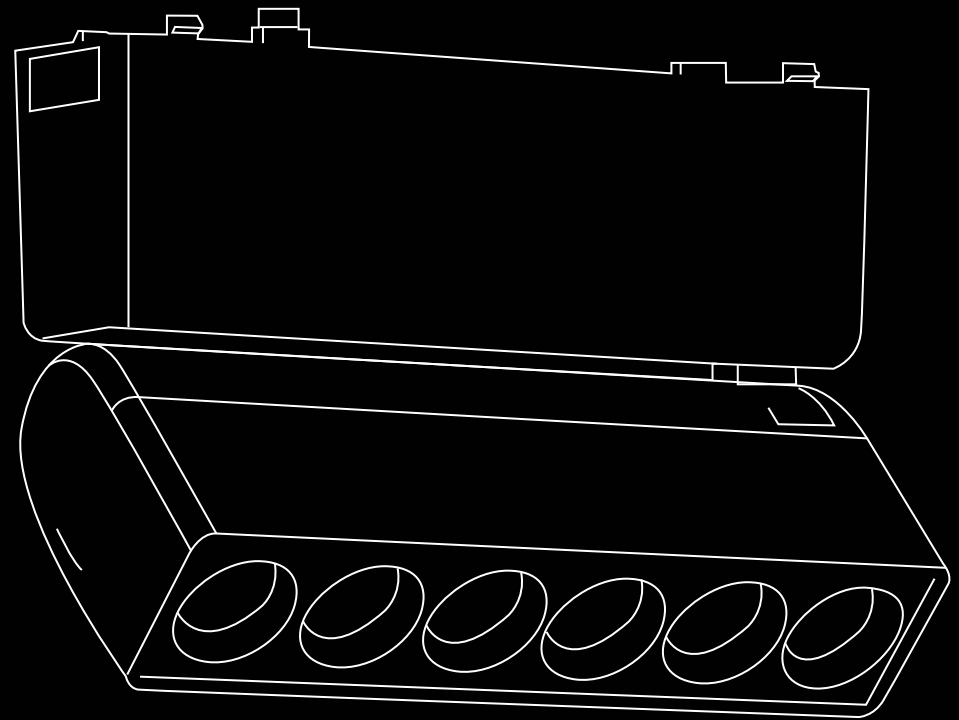

MAGNETIC TRACK LIGHT



SHLOKA

SA- 01

Magnetic Track

Construction Material : Aluminium Die Cast
Body Colour : Black

⚡ Wattages
12W | 18W
24W | 30W

↔ Length (mm)
222, 330, 449, 546

↔ Wide(mm)
26, 26, 26, 26

↕ Heights (mm)
24, 24, 24, 24

Beam Angle
110 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
OSRAM

Dimmable & Tuneable
2.4G Remote & App Control

Light Colours :
2.4G (Dimmable & Tuneable)




SHLOKA

SA-02


Magnetic Track

Construction Material : Aluminium Die Cast
Body Colour : Black

 Wattages
6W | 12W | 18W

 Length (mm)
115, 221, 330

 Wide(mm)
26, 26, 26

 Heights (mm)
24, 24, 24

Beam Angle
24 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV


IP Rating
IP20

Led Chip
OSRAM

Dimmable & Tuneable
2.4G Remote & App Control

Light Colours :

2.4G (Dimmable & Tuneable)

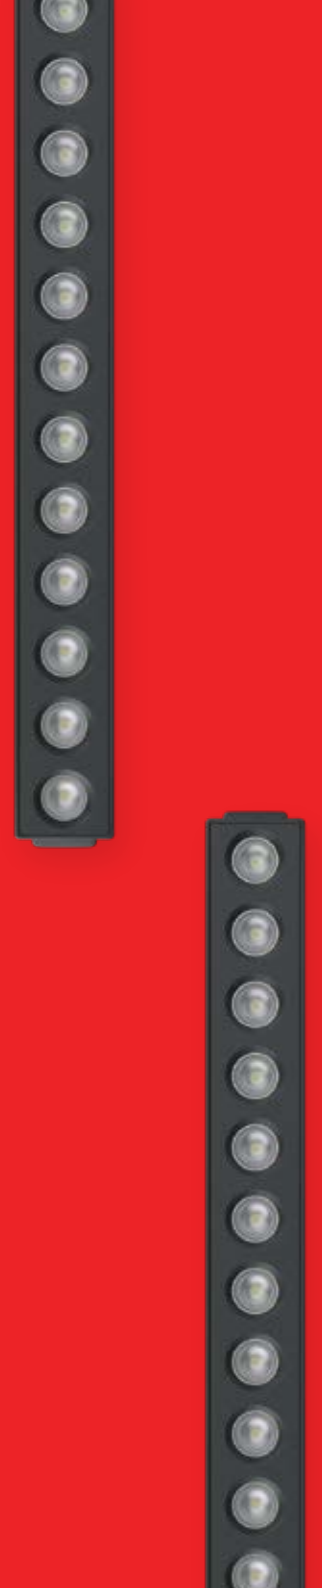



SHLOKA

SA-06

Magnetic Track

Construction Material : Aluminium Die Cast
Body Colour : Black



Wattages
6W



Length (mm)
112



Wide(mm)
25



Heights (mm)
43

Beam Angle
24 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
OSRAM

Dimmable & Tuneable
2.4G Remote & App Control

Light Colours :

2.4G (Dimmable & Tuneable)

SHLOKA

SA-07

Magnetic Track

Construction Material : Aluminium Die Cast
Body Colour : Black



Light Colours :
2.4G (Dimmable & Tuneable)
Shapes : Round



Wattages | Size
10W | 20W | 30W



Product Length (mm)
105, 130, 155



Dimensions (mm)
47, 57, 67



Base Length (mm)
113, 113, 113



Base Width (mm)
25, 25, 25



Beam Angle
24 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
OSRAM

Dimmable & Tuneable
2.4G Remote & App Control

SHLOKA

Accessories



M DRIVER

100w | 200w Driver
Volt: 48v

Length (mm)	Width(mm)
500, 1000	25, 25

TR-01 JOINTERS

Straight & L Jointer
90 Vertical Jointer


Width(mm)
25



SA-TR01 Slim Surface Track

Construction Material :
Aluminium Die Cast & Copper


Length	Width (mm)
1Mtr 2Mtr	25



TR-04

L Jointer
90 Vertical Jointer


Width(mm)
25

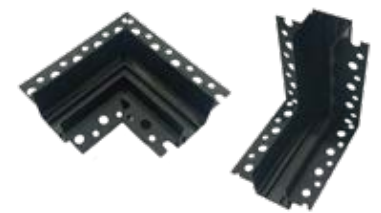

SA-TR04 Recessed Track

Construction Material :
Aluminium Die Cast & Copper

Length	Width(mm)
1Mtr 2Mtr	25



SA-SP 04

Connection
Module
Width(mm)
25




REMOTE

2.4g Remote
Controller



05.

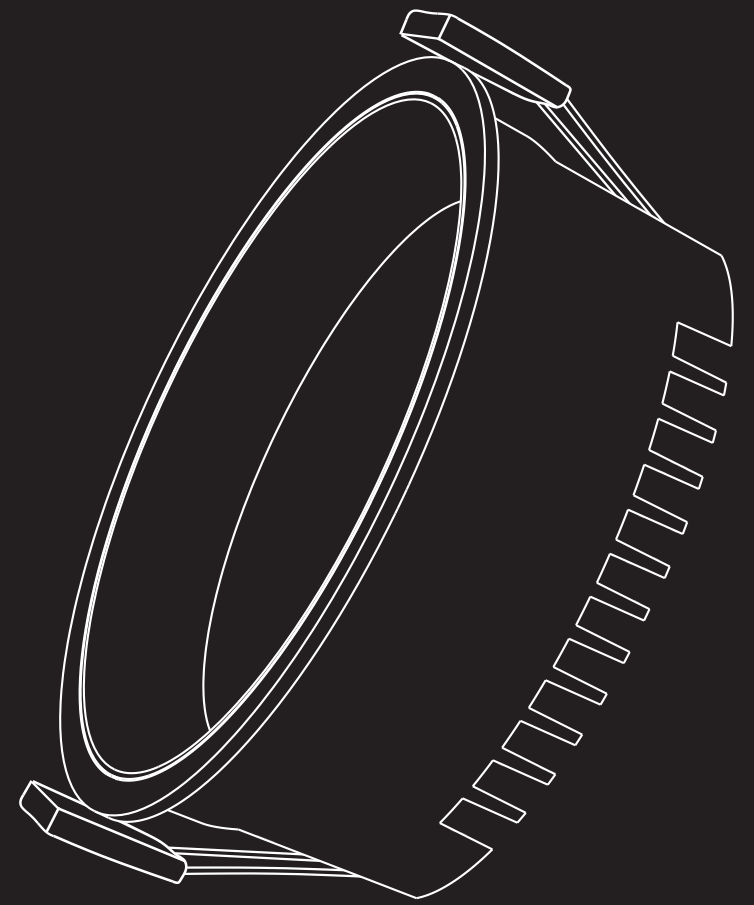

DOWNLIGHT



BREZZA

Downlight

Construction Material : Aluminium Die Cast
Body Colour : White & Black



Wattages
12W | 18W | 24W



Dimensions (mm)
100, 130, 150



Cutouts (mm)
95, 125, 145



Height (mm)
50, 50, 50

Beam Angle
120 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

Dimmable & Tuneable
2.4G Remote & App Control

Light Colours :

3CCT Switch : WW  NW  CW 

2.4G (Dimmable & Tuneable)

Shapes : Round

Reflector :

Gun Black, Rose Gold, Matt Black & Matt White

IMAGINA

Downlight

Construction Material : Aluminium Die Cast
Body Colour : White



Light Colours :

WW  NW  CW 

3 in 1 (WW, NW, CW)

2.4G (Dimmable & Tuneable)

Shapes : Round & Square



Beam Angle
60 Degree

CRI
> 90

Switch Tuneable
Yes

PF
0.9 PF

Lumens/Watt
110 Lm/w


Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

Dimmable & Tuneable
2.4G Remote & App Control

 Wattages
12W | 18W

 Dimensions (mm)
120, 154

 Cutouts (mm)
115, 150

 Heights (mm)
50, 55



INAAYA

Downlight

Construction Material : Polycarbonate
Body Colour : White



Wattages
6W | 12W



Dimensions (mm)
118, 143



Cutouts (mm)
100, 125



Height (mm)
38, 38

Light Colours :

4CCT Switch : WW  NW  CW  & 3 in 1

Shapes : Round



Beam Angle
120 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar

Switch Tuneable
Yes



Beam Angle
120 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar



Wattages
10W | 15W | 20W



Cutouts (mm)
99, 129, 149



Dimensions (mm)
116, 144, 166



Heights (mm)
22, 22, 22

SHIVA

Downlight

Construction Material : Polycarbonate
Body Colour : White

Light Colours :

WW  NW  CW 

Shapes : Round



SIFRA+

Downlight

Construction Material : Polycarbonate
Body Colour : White



Light Colours :

WW  NW  CW 

Shapes : Round



Wattages
12W



Cutouts (mm)
102



Dimensions (mm)
130



Height (mm)
29

Beam Angle
120 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar



RHAYA

Downlight

Construction Material : Aluminium Die Cast
Body Colour : Black & White



Wattages
7W | 12W | 18W



Dimensions (mm)
60, 80, 90



Cutouts (mm)
47, 56, 63



Heights (mm)
53, 62, 69

Light Colours :

3 CCT Switch : WW  NW  CW 

2.4G (Dimmable & Tuneable)

Shapes : Round

Reflectors : Matt Black, Matt White & Gun Metal



Beam Angle
120 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

Dimmable & Tuneable
2.4G Remote & App Control



ZIGMA

Downlight

Construction Material : Polycarbonate
Body Colour : White



Wattages
6W | 12W | 18W



Dimensions (mm)
118, 143, 165



Cutouts (mm)
100, 125, 150



Heights (mm)
28, 28, 28

Light Colours :

3CCT Switch : WW  NW  CW 

Shapes : Round & Square



Beam Angle
120 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar



LUMIA+

Downlight

Construction Material : Polycarbonate
Body Colour : White



Wattages
6W | 12W | 18W



Dimensions (mm)
118, 143, 166



Cutouts (mm)
100, 125, 150



Height (mm)
38, 38, 38

Beam Angle
120 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar

Switch Tuneable
Yes

Light Colours :

3 in 1 (WW, NW, CW)

Shapes : Round & Square

YAAMA

Downlight

Construction Material : Aluminium Die Caste

Body Colour : White & Black



Light Colours :

3CCT Switch : WW  NW  CW 

Shapes : Round



Beam Angle
120 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar



Wattages
15W



Dimensions (mm)
109



Cutouts (mm)
75






Heights (mm)
30



Light Colours :

WW  NW  CW 

Red  Green  Blue 

Pink 

Shapes : Round



Wattages
7W



Dimensions (mm)
110



Cutouts (mm)
63



Height (mm)
40

Beam Angle
90 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20


Led Chip
Epistar



RETHA

Downlight

Construction Material : Polycarbonate
Body Colour : White

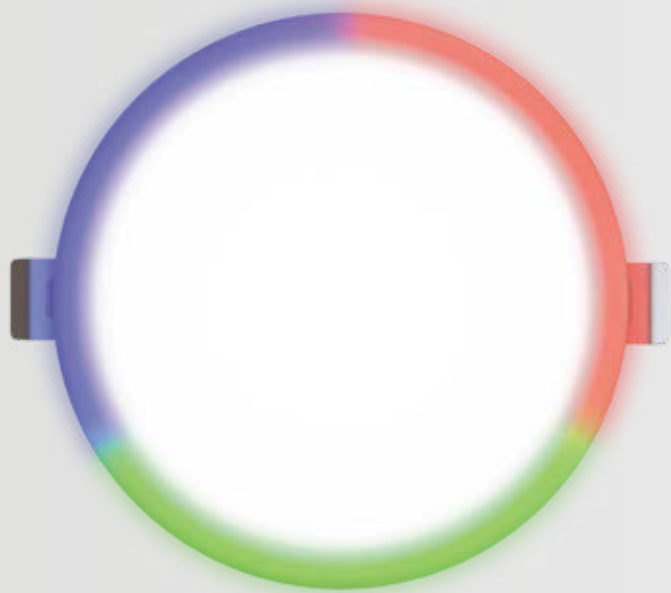

JOFRA

Downlight

Construction Material : Polycarbonate
Body Colour : White

Light Colours :

CW+CW  CW+WW 

CW+B  CW+PK 

CW+PGB  CW+RGB 

Shapes : Round



Wattages

7W + 7W

12W + 12W (Adjustable Concealed)



Dimensions (mm)

85, 130



Cutouts (mm)

43, 50



Height (mm)

20, 20

Beam Angle
120 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar



LEEZA+

Downlight

Construction Material : Polycarbonate
Body Colour : White



Wattages
6W



Dimensions (mm)
110






Cutouts (mm)
63




Heights (mm)
15


Light Colours :

WW  NW  CW 

Red  Green  Blue 

Pink 

Shapes : Round

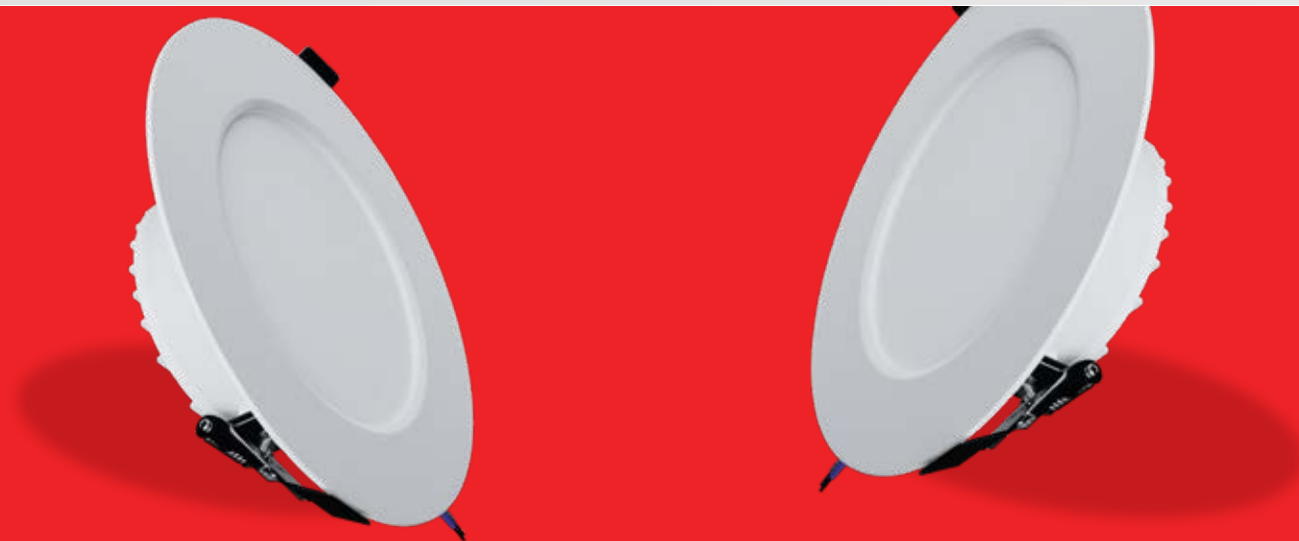

Beam Angle
90 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar

TRISA

Downlight

Construction Material : Polycarbonate

Body Colour : White




Light Colours :

3 in 1 (WW, NW, CW)

3 in 1 (R, B, PK)

Shapes : Round

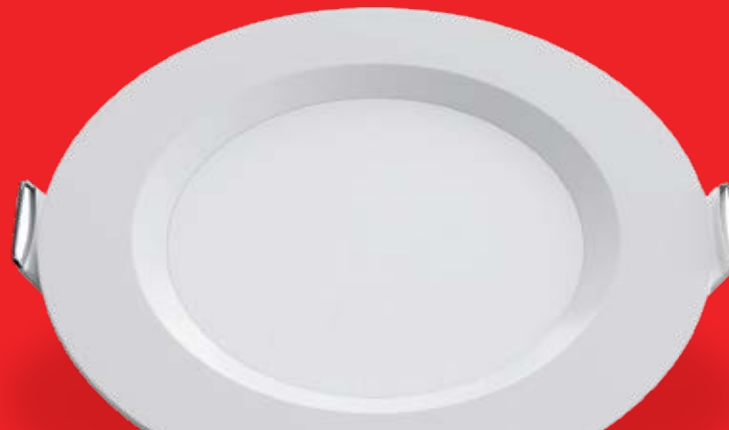

Beam Angle
90 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar

Switch Tuneable
Yes



Wattages
7W



Dimensions (mm)
110



Cutouts (mm)
63



Heights (mm)
40






LEEZA

Downlight

Construction Material : Polycarbonate
Body Colour : White

Light Colours :

WW  NW  CW 

Red  Green  Blue 

Pink 

Shapes : Round



Wattages
6W



Cutouts (mm)
63



Dimensions (mm)
106



Heights (mm)
20

Beam Angle
90 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV




IP Rating
IP20

Led Chip
Epistar



Light Colours :

WW  NW  CW 

Red  Green  Blue 

Pink 

3 in 1 (WW, NW, CW)

3 in 1 (R, B, PK)

Shapes : Round



Wattages
3W | 9W



Dimensions (mm)
75, 107



Cutouts (mm)
45, 73



Height (mm)
26, 29



YAAMA

Downlight

Construction Material : Polycarbonate

Body Colour : White

Beam Angle
60 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar

Switch Tuneable
Yes



LIVIA

Downlight

Construction Material : Polycarbonate
Body Colour : White



Wattages
3W



Dimensions (mm)
75






Cutouts (mm)
45



Heights (mm)
45

Light Colours :

WW  NW  CW 

Red  Green  Blue 

Pink 

3 in 1 (WW, NW, CW)

3 in 1 (R, B, PK)

Shapes : Round



Beam Angle
60 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar

Switch Tuneable
Yes



Wattages
7W



Dimensions (mm)
80



Cutouts (mm)
41



Height (mm)
35

Beam Angle
120 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar




KAASA

Downlight

Construction Material : Polycarbonate
Body Colour : White

Light Colours :

WW  NW  CW 

Red  Green  Blue 

Pink 

Shapes : Round

ZEEYA




Downlight

Construction Material : Polycarbonate
Body Colour : White



Light Colours :

WW  CW  Red 

Green  Blue  Pink 

Shapes : Round



Beam Angle
90 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar



Wattages
3W



Dimensions (mm)
77




Cutouts (mm)
48



Heights (mm)
25

06.

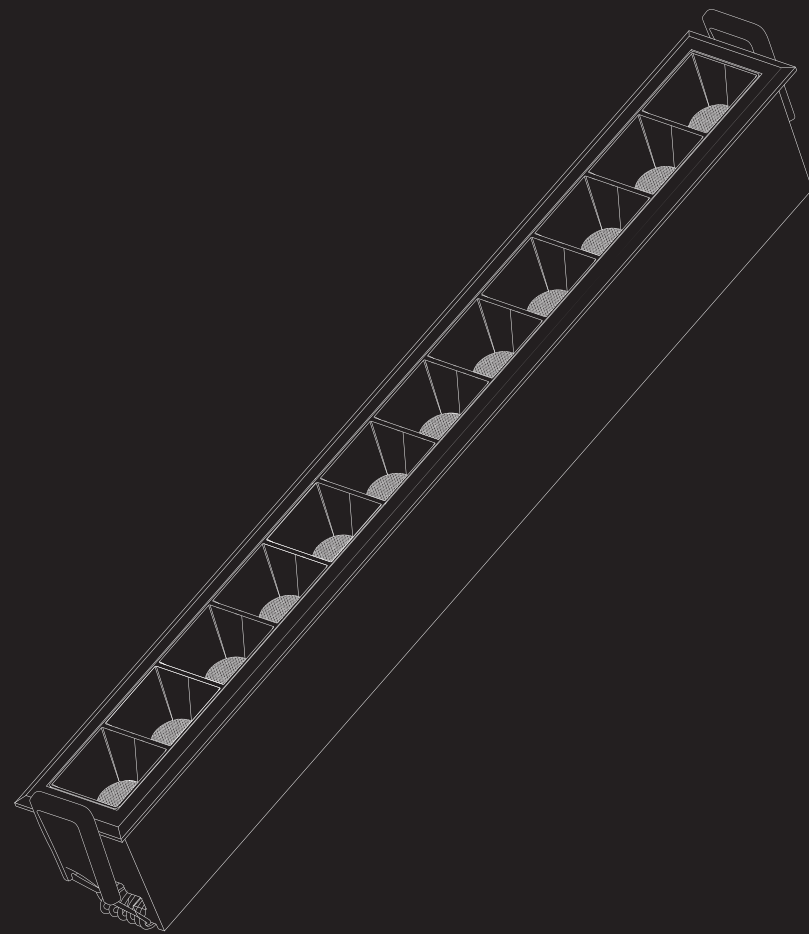

LINEAR SPOT



CELINA

Linear Spot Light

Construction Material : Aluminium Die Cast
Body Colour : Matt Black & Matt White

Light Colours :

4CCT Switch : WW  NW  CW  & 3 in 1

2.4G (Dimmable & Tuneable)

Shapes : Linear



Wattages
15W | 30W



Dimensions (mm)
91 X 55 X 64
162 X 55 X 64



Cutouts (inches)
77 X 45
147 X 45



Beam Angle
36 Degree

CRI
> 90


PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

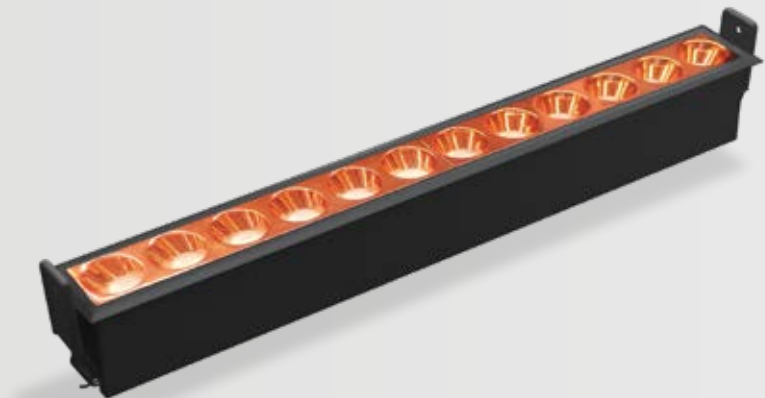

Light Colours :

3CCT Switch : WW  NW  CW 

Shapes : Linear

Reflector : Black & Rose Gold



Wattages
5W | 10W | 20W



Dimensions (mm)
68 X 30 X 35
125 X 30 X 35
240 X 30 X 35



Cutouts (inches)
64 X 26
120 X 26
235 X 26

Beam Angle
24 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV


IP Rating
IP20

Led Chip
Bridgelux

DELTA

Linear Spot Light

Construction Material : Aluminium Die Cast
Body Colour : White & Black

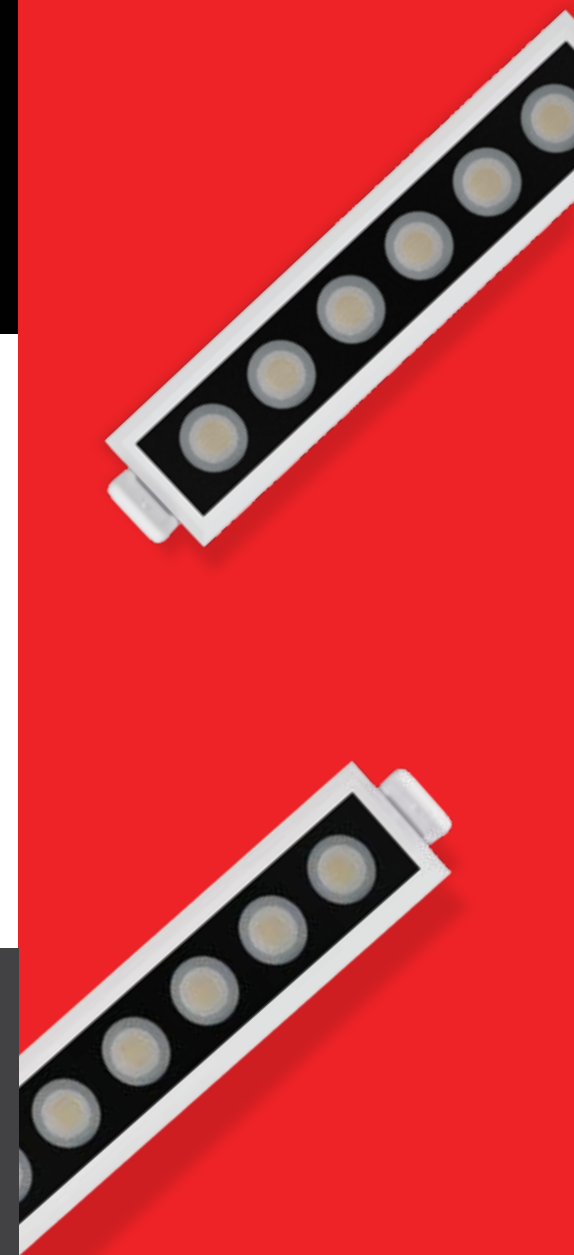

ELIZA

Linear Hanging Light

Construction Material : Aluminium Die Cast
Body Colour : Black



Light Colours :

3CCT Switch : WW  NW  CW 



Beam Angle
120 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

 Wattages | Size
42W | 45W | 4FT

 Length (mm)
1833, 1833

 Wide(mm)
33, 33

 Heights (mm)
56, 56

MAGNA

Linear Profile Light

Construction Material : Polycarbonatet
Body Colour : Black



Light Colours :

WW  NW  CW 



Beam Angle
120 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux



Wattages | Size
5W | 10W | 1FT | 2FT



Length (mm)
293, 583



Wide(mm)
18, 18



Heights (mm)
8, 8



LARISA


Linear Hanging Light

Construction Material : Aluminium Die Cast + Polycarbonate
Body Colour : Black

Light Colours :

3CCT Switch : WW  NW  CW 

 Wattages
40W

 Length (mm)
1150

 Wide(mm)
45

 Heights (mm)
32

Beam Angle
24 Degree

CRI
> 90

PF
0.9 PF


Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux




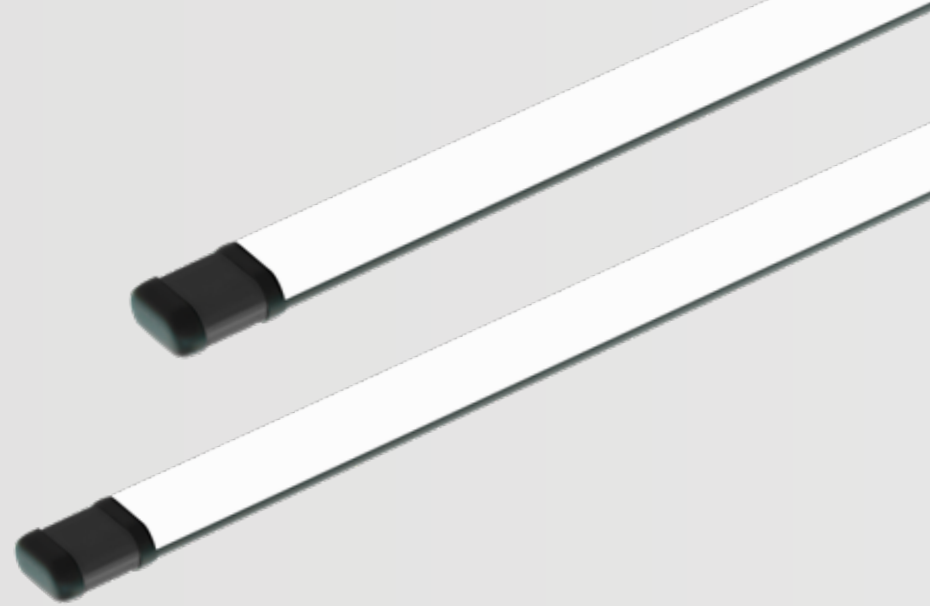

LARISA+

Linear Hanging Light

Construction Material : Aluminium Die Cast + Polycarbonate
Body Colour : Black

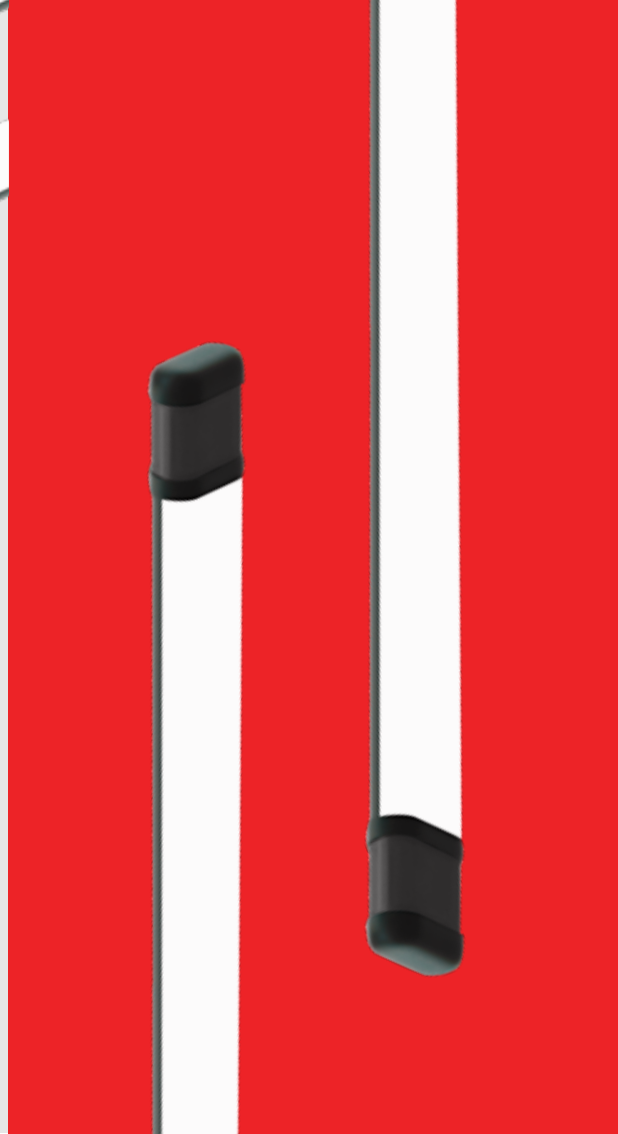

Light Colours :

3CCT Switch : WW  NW  CW 



Wattages
40W



Wide(mm)
45



Length (mm)
1150



Heights (mm)
32

Beam Angle
120 Degree

CRI
> 90

PF
0.9 PF


Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

07.

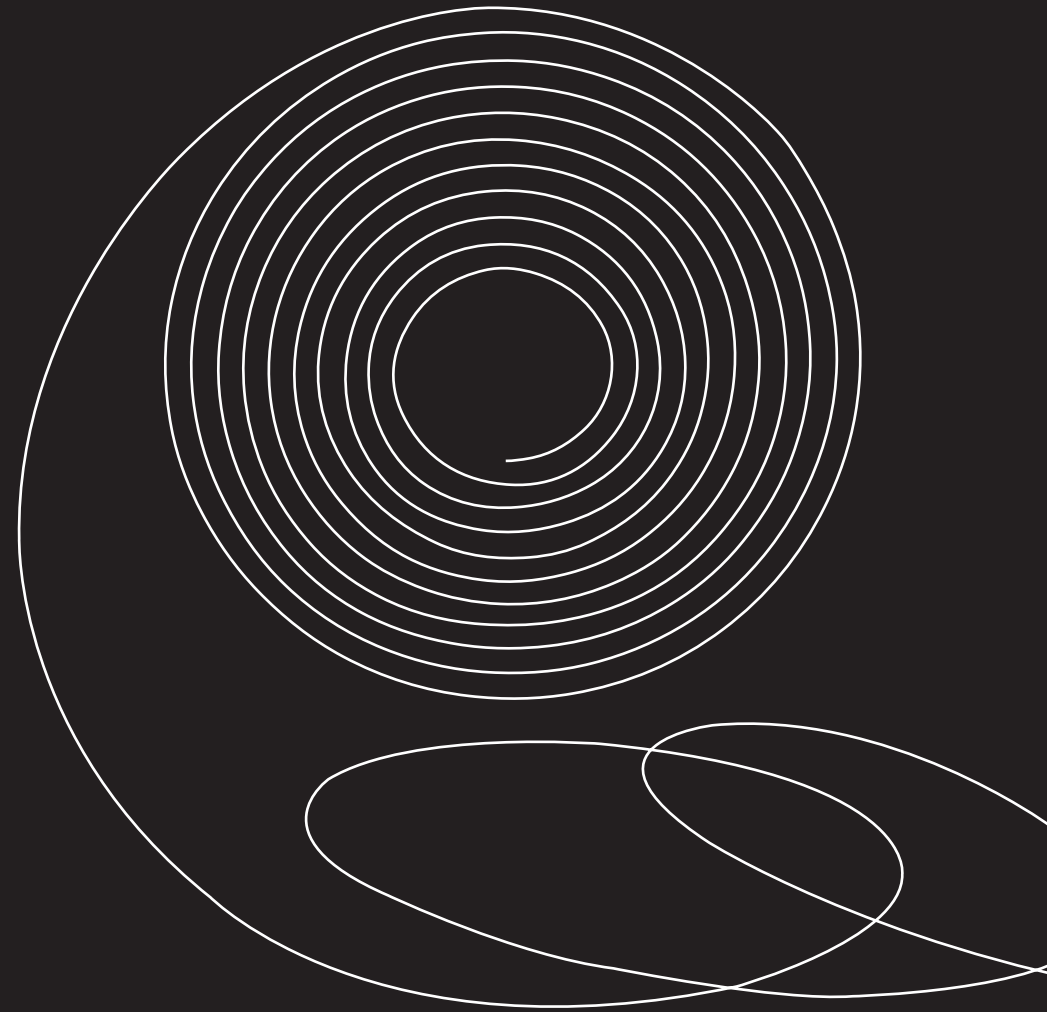

ROPE LIGHT

SIWANA




LED Rope Light




Construction Material : Silicon



Light Colours :

WW  NW  CW 

Red  Green  Blue 

Pink  Amber  IB 



LED/MTR
120

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP66

Led Chip
2835

PCB Width
10mm



Wattages
10W/MTR



Size (mtr)
50 MTR

OLIVIA

LED Rope Light

Construction Material : Silicon



Wattages
8W/MTR



Size (mtr)
50 MTR

LED/MTR
120 | 60

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP66

Led Chip
2835

PCB Width
10mm



Light Colours :

6 in 1 (R, G, B, PK, WW, NW)





EUREKA

LED Rope Light

Construction Material : Silicon





Wattages
12W/MTR



Size (mtr)
100 MTR

Light Colours :

WW  NW  CW 

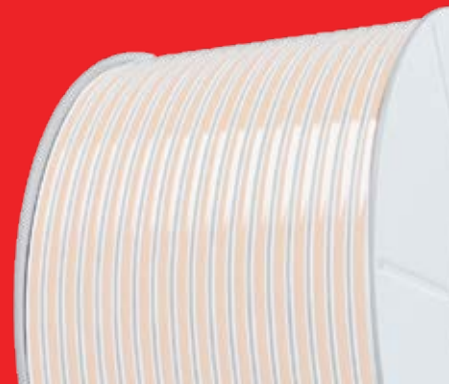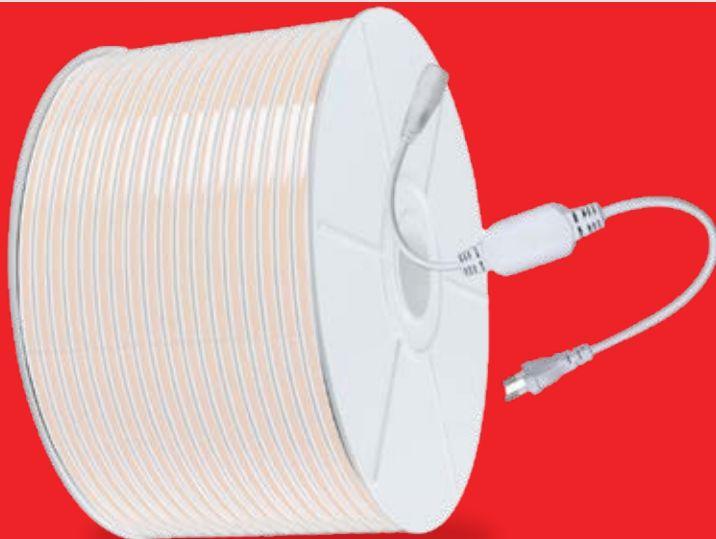

LED/MTR
288/M

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV










IP Rating
IP66

Led Chip
2835

PCB Width
12mm



Light Colours :

WW  NW  CW 
Red  Green  Blue 
Pink  Amber  IB 

LED/MTR
288/M

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP66

Led Chip
2835

PCB Width
12mm

CONTRA

LED Rope Light


Construction Material : Silicon



Wattages
12W/MTR



Size (mtr)
50MTR
100 MTR

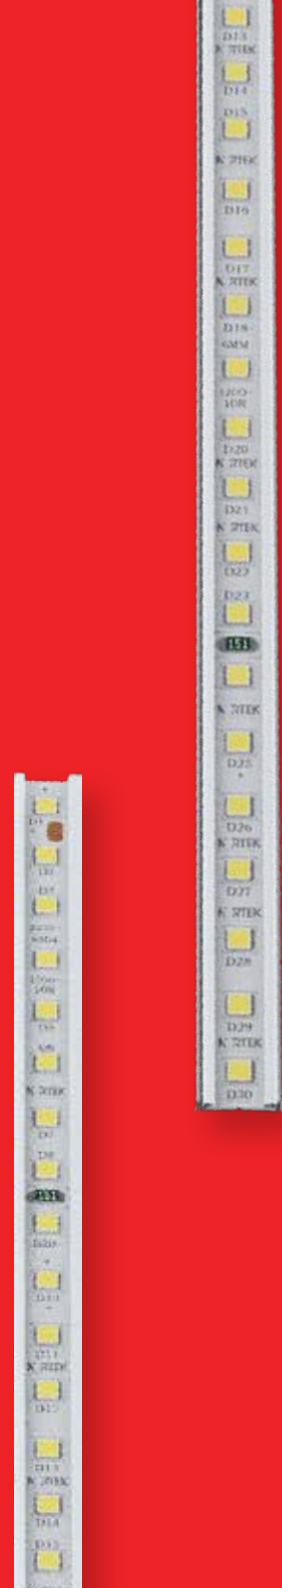

Wattages
6W/MTR



Size (mtr)
50 MTR

LED/MTR
120 | 60

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kv

IP Rating
IP66

Led Chip
2835 | 5050

PCB Width
10mm

FLEXA

LED Rope Light










Construction Material : Silicon

Light Colours :

- WW  NW  CW 
- Red  Green  Blue 
- Pink  Amber  IB 
- RGB 




Light Colours :

- WW  NW  CW 
Red  Green  Blue 
Pink  Amber  IB 



 Wattages
6W/MTR

 Size (mtr)
50 MTR

FLEXA+

LED Rope Light

Construction Material : Silicon

LED/MTR
120

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w


Surge Protection
2.5 kV

IP Rating
IP66


Led Chip
2835

PCB Width
10mm



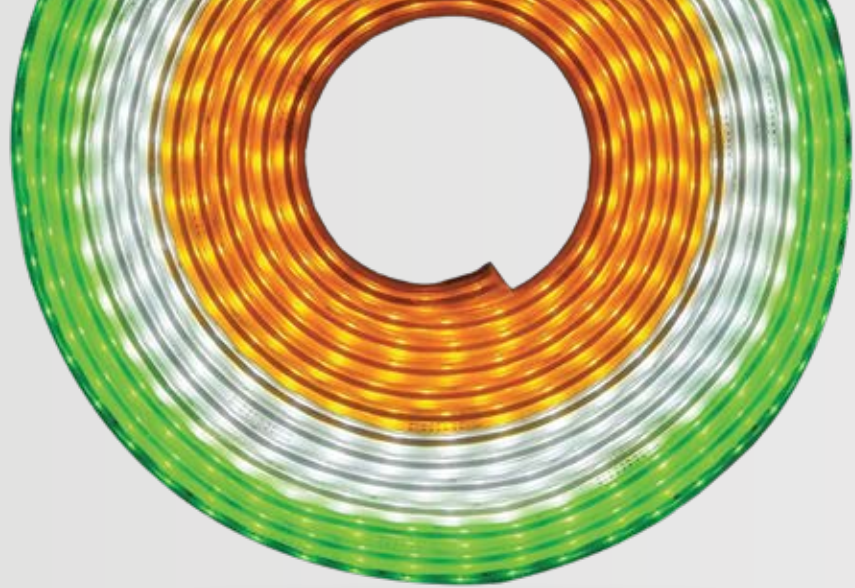

Light Colours :

Amber 

CW 



G 



Wattages
12W/MTR



Size (mtr)
30 MTR (10-10-10)

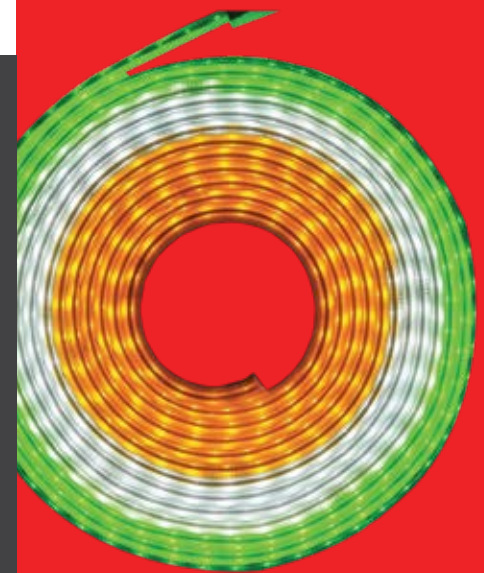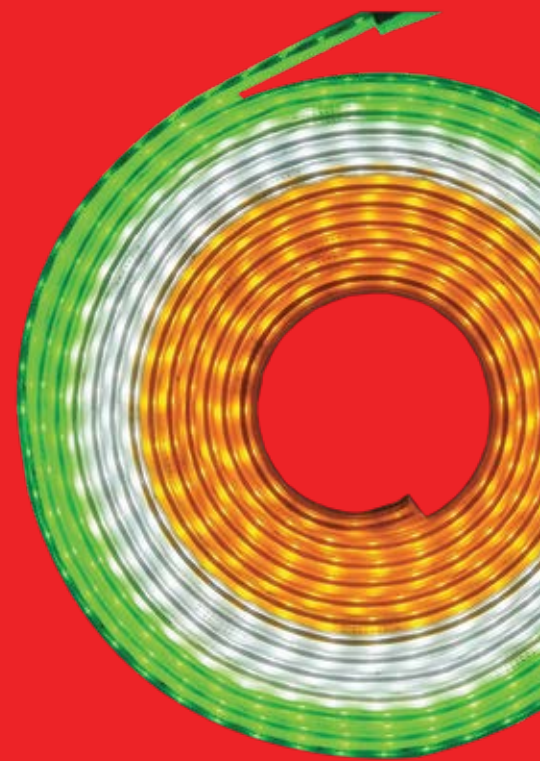

TIRANGA

LED Rope Light

Construction Material : Silicon

LED/MTR
120

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP66

Led Chip
2835

PCB Width
12mm

08.



STRIP LIGHT

TISYA

COB Strip Light

Construction Material : Copper






Wattages
12W/MTR






Size (mtr)
5 MTR
10 MTR

Light Colours :

WW  NW  CW 

Red  Green  Blue 

Pink  Amber  IB 

3 in 1 (WW, NW, CW)



LED/MTR
480

CRI
> 90

PCB Width
8mm | 5mm

Lumens/Watt
110 Lm/w

Voltage
24V

IP Rating
IP65

Dimmable & Tuneable
2.4G Remote & App Control



NITYA LED Strip Light

Construction Material : Copper

Light Colours :

WW  NW  CW 

LED/MTR
120 | 240

CRI
> 90

Voltage
12V | 24V

IP Rating
IP20

PCB Width
5mm | 10mm

Lumens/Watt
110 Lm/w

Led Chip
2835



Wattages
20W/MTR



Size (mtr)
10 MTR

LAURA

LED Strip Light

Construction Material : Copper



Light Colours :

3 in 1 (WW, NW, CW)

2.4G (Dimmable & Tuneable)

LED/MTR
240

CRI
> 90

PCB Width
10mm

Lumens/Watt
110 Lm/w

Voltage
24V

IP Rating
IP20

Led Chip
2835

Dimmable & Tuneable
2.4G Remote & App Control



Wattages
24W/MTR



Size (mtr)
5 MTR

INFRA

LED Strip Light

Construction Material : Copper



Light Colours :

WW  NW  CW 



LED/MTR
240

CRI
> 90

PCB Width
110mm

Lumens/Watt
110 Lm/w

Voltage
12V

IP Rating
IP20

Led Chip
2835



Wattages
12W/MTR | 15W/MTR



Size (mtr)
5 MTR

REGALIA

LED Strip Light

Construction Material : Copper






Wattages
6W/MTR | 12W/MTR
15W/MTR | 18W/MTR



Size (mtr)
5 MTR

Light Colours :

WW  NW  CW 

Red  Green  Blue 

Pink  Amber  IB 



LED/MTR
60 | 120 | 180 | 240

CRI
> 90

PCB Width
5mm | 8mm | 10mm


Lumens/Watt
110 Lm/w

Voltage
12V

IP Rating
IP20

Led Chip
2835 | 4040

09

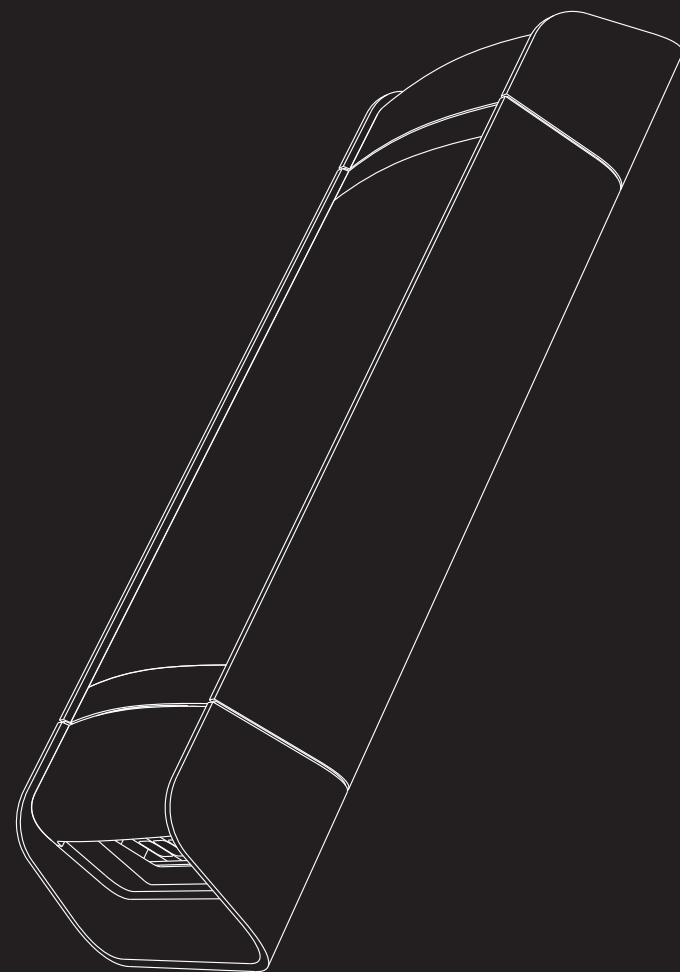

LED DRIVER



GAAMA+

LED Driver

Construction Material : Aluminium Die Cast
Body Colour : Black




Wattages
200W | 400W
Ampere
8.3Amp | 16.6Amp

24V LED Driver



Dimmable



Tuneable



2.4G Remote & App Control



GAAMA

LED Driver

Construction Material : Aluminium Die Cast
Body Colour : Black

24V LED Driver
40 Months Warranty

Finish Type :
Powder Coated



Wattages
60W | 100W | 200W
300W | 400W

Ampere
2.5Amp | 4.15Amp | 8.3Amp
12.5Amp | 16.5Amp





TESLA

LED Driver

Construction Material : Aluminium Die Cast
Body Colour : Black



Wattages

24W | 60W | 100W | 120W
150W | 200W | 240W

Ampere

2Amp | 5Amp | 8.3Amp
10Amp | 12.5Amp | 16.7Amp
20Amp

12V LED Driver

Finish Type :
Powder Coated

TESLA+

LED Driver

Construction Material : Polycarbonate
Body Colour : White




Wattages
8 - 24W Single Pin
8 - 24W Double Pin

Buring Hours
50,000

Compatible
Panel Lights

IP Rating
IP20

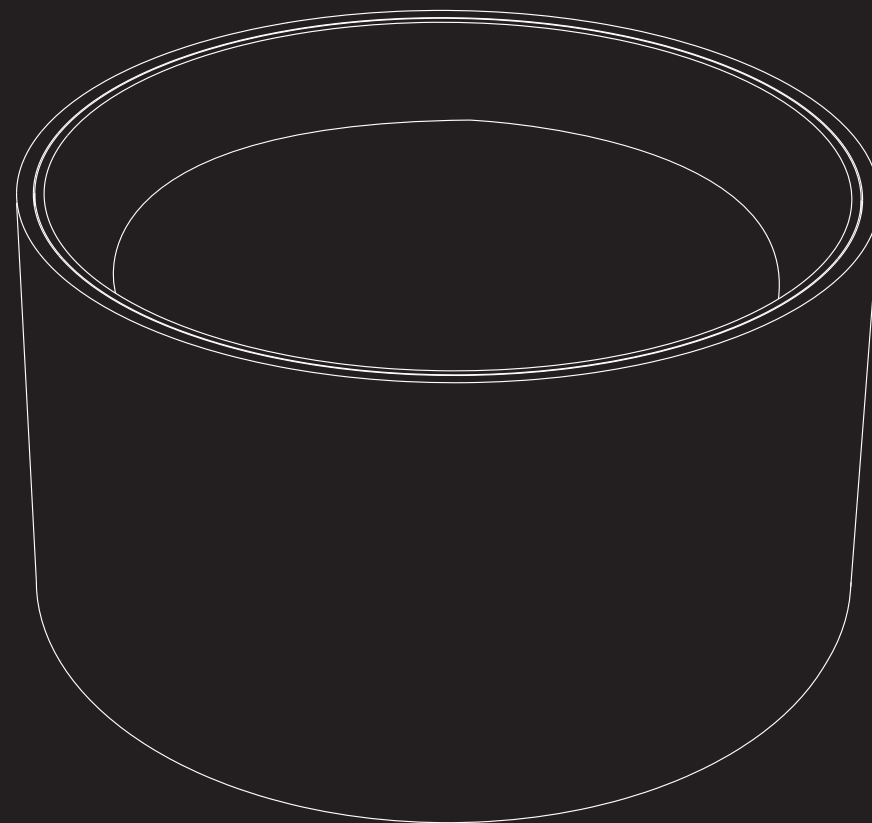

SURFACE PANEL

IINARA

Surface Panel Light

Construction Material : Polycarbonate
Body Colour : Black & White




Light Colours :

WW  + (WW  NW  CW )

WW  + (PK  B  P )

Shapes : Round

Reflector : Black, White & Rose Gold

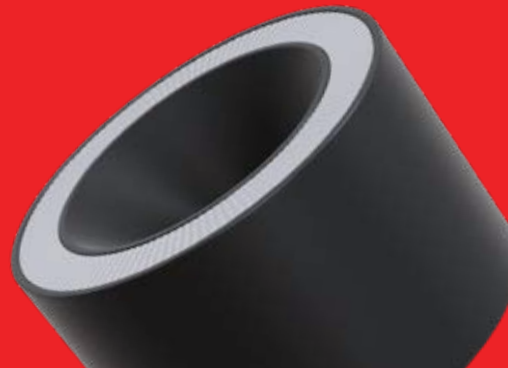

Beam Angle
24 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

Led Chip
Bridgelux



Wattages
8+8W



Dimensions (mm)
80



Height (mm)
45



EMAYA

Surface Panel Light

Construction Material : Aluminium Die Cast
Body Colour : Black



Wattages
12W | 18W | 24W



Dimensions (mm)
92, 122, 142



Height (mm)
75, 75, 75

Beam Angle
120 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

Dimmable & Tuneable
2.4G Remote & App Control

Light Colours :

3CCT Switch : WW  NW  CW 

2.4G (Dimmable & Tuneable)

Shapes : Round

Reflector : Gun Black, Rose Gold & Matt Black



KRSINA

Surface Panel Light

Construction Material : Polycarbonate
Body Colour : Black & White






Wattages
5W | 10W | 15W



Dimensions (mm)
61, 95, 130

Light Colours :

WW  NW  CW 


Red  Green  Blue 

Pink 

3 in 1 (WW, NW, CW)

3 in 1 (PK, G, B)

Shapes : Round & Square

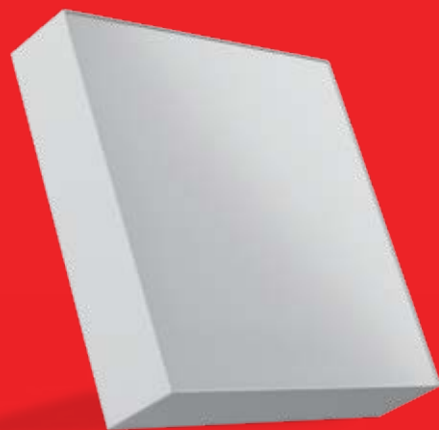

Beam Angle
120 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Bridgelux

Switch Tuneable
Yes



SUPERIA

Surface Panel Light

Construction Material : Aluminium Die Cast
Body Colour : White



Wattages
8W | 15W | 22W



Dimensions (mm)
110, 156, 203



Height (mm)
26, 26, 26

Beam Angle
120 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV




IP Rating
IP20

Led Chip
Epistar

Switch Tuneable
Yes

Light Colours :

WW  NW  CW 

Red  Green  Blue 

3 in 1 (WW, NW, CW)

Shapes : Round & Square



PRIMA+

Surface Panel Light

Construction Material : Aluminium Die Cast
Body Colour : White



Wattages
3W + 3W | 6W + 3W | 12W + 4W



Dimensions (mm)
104, 150, 190



Heights (mm)
25, 25, 25

Light Colours :

CW  + (WW  Green  Blue )

Pink  RGB   )

Shapes : Round & Square



Beam Angle
180 Degree

CRI
> 90


PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar

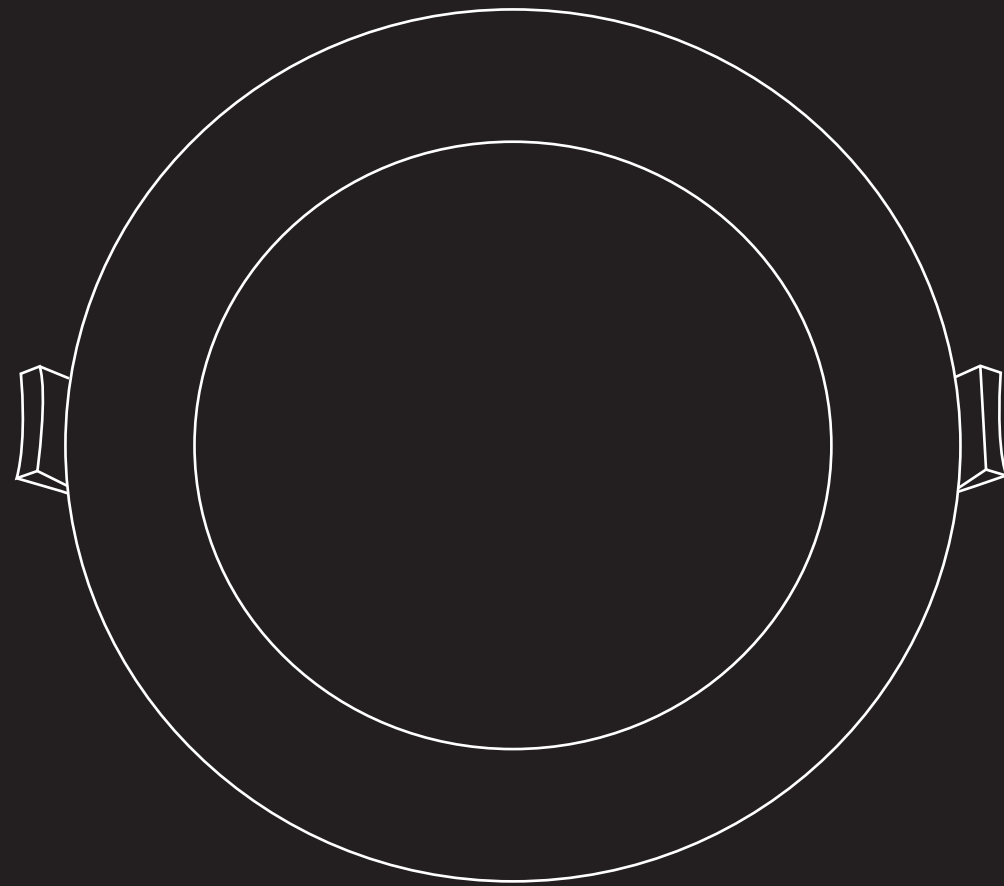

PANEL LIGHT



Light Colours :

WW 

NW 

CW 

Shapes : Round & Square



Wattages
8W | 12W | 15W
18W | 22W



Dimensions (mm)
118, 145, 170, 190, 223



Cutouts (mm)
99, 127, 152, 178, 211



Height (mm)
20, 20, 20



THEAA

Panel Light

Construction Material : Aluminium Die Cast

Beam Angle
180 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV


IP Rating
IP20

Led Chip
Epistar

PRESA

Panel Light

Construction Material : ABS Frame & PS Diffuser
Body Colour : White

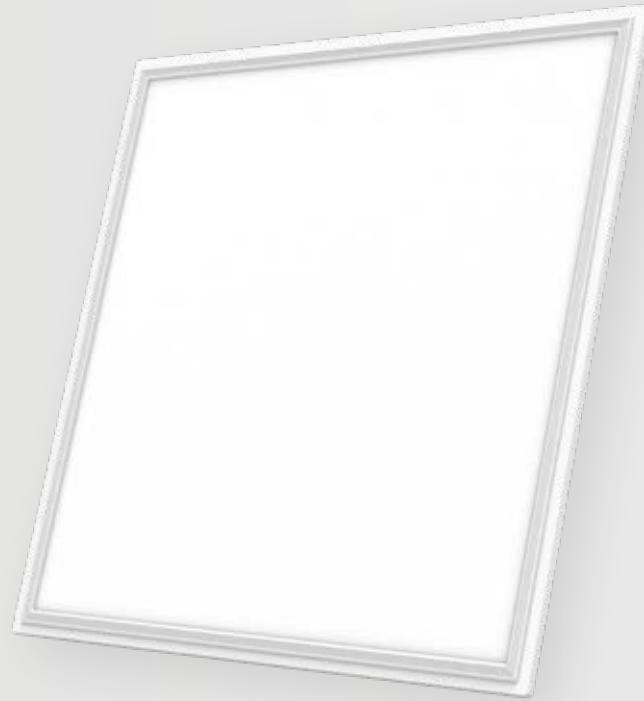

Light Colours :

NW 

CW 

Shapes : Square

Beam Angle
120 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
4 kV

IP Rating
IP20

Led Chip
Epistar



Wattages
42W



Dimensions (mm)
610 X 610



Light Colours :

WW 

NW 

CW 

Shapes : Round & Square



Wattages
8W | 12W | 15W
18W | 22W



Dimensions (mm)
118, 145, 170, 190, 223



Cutouts (mm)
99, 127, 152, 178, 211



Height (mm)
20, 20, 20



KIARA

Panel Light

Construction Material : Aluminium Die Cast
Body Colour : White

Beam Angle
180 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar



LUMIA

Panel Light

Construction Material : Aluminium Die Cast
Body Colour : White

Light Colours :

3 in 1 (WW, NW, CW)

Shapes : Round & Square



Wattages
6W | 12W



Dimensions (mm)
118, 168



Cutouts (mm)
99, 152



Height (mm)
20, 20

Beam Angle
180 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar



NEXIA

Panel Light

Construction Material : Polycarbonate
Body Colour : White



Wattages
3W | 6W | 12W | 18W



Dimensions (mm)
74, 99, 152, 203






Cutouts (mm)
65, 100, 150, 200



Heights (mm)
11, 11, 11, 11

Light Colours :

WW  NW  CW 

Red  Green  Blue 

Shapes : Round & Square



Beam Angle
180 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar

MASSA

Panel Light


Construction Material : Aluminium Die Cast
Body Colour : White



Light Colours :

WW  NW  CW 

Shapes : Round & Square

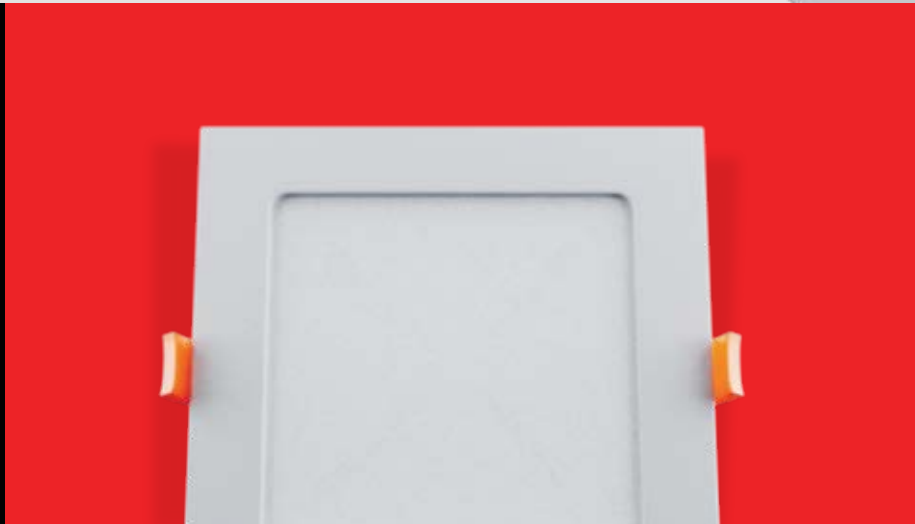

Beam Angle
180 Degree

CRI
> 90

PF
0.9 PF


Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV


IP Rating
IP20

Led Chip
Epistar

 Wattages
6W | 12W

 Dimensions (mm)
120, 170

 Cutouts (mm)
99, 157

 Heights (mm)
20, 20



TAARA

Panel light

Construction Material : Polycarbonate



Wattages
6W + 6W



Dimensions (mm)
140



Cutouts (mm)
110



Height (mm)
13

Light Colours :

CW+PGB

Shapes : Round



Beam Angle
180 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar



PRIVIA

Panel Light

Construction Material : Aluminium Die Cast
Body Colour : White



Wattages
**3W + 3W | 6W + 3W |
12W + 4W**



Dimensions (mm)
112, 140, 170



Cutouts (mm)
63, 101, 140



Height (mm)
13, 13, 13

Beam Angle
180 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar


Light Colours :

CW  + (WW  Green  Blue )

Pink  RGB   )

Shapes : Round & Square

12.

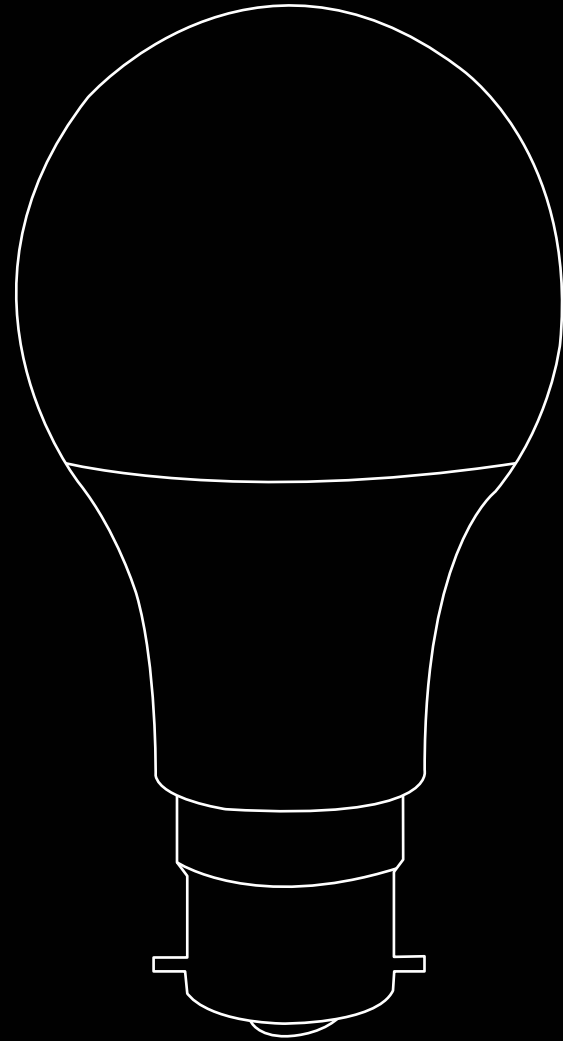

**BULB AND
INVERTER BULB**

DISHA

LED Bulb

Construction Material : Polycarbonate
Body Colour : White



Light Colours :

CW



Wattages

5W | 7W | 9W | 12W | 15W |
20W | 30W | 40W | 50W

IP Rating
IP20

Mounting Type
B22

Surge Protection
2.5 kV

FABIA

LED Bulb

Construction Material : Polycarbonate
Body Colour : White



Light Colours :

CW



Wattages
15W



Backup
Upto 12 hrs



Battery Capacity
2200 Mah

IP Rating
IP20

DIMMABLE
3 STEP

FIONA

LED Bulb

Construction Material : Polycarbonate



Light Colours :

CW




Wattages
9W

IP Rating
IP20

Mounting Type
B22

Surge Protection
2.5 kV

13.

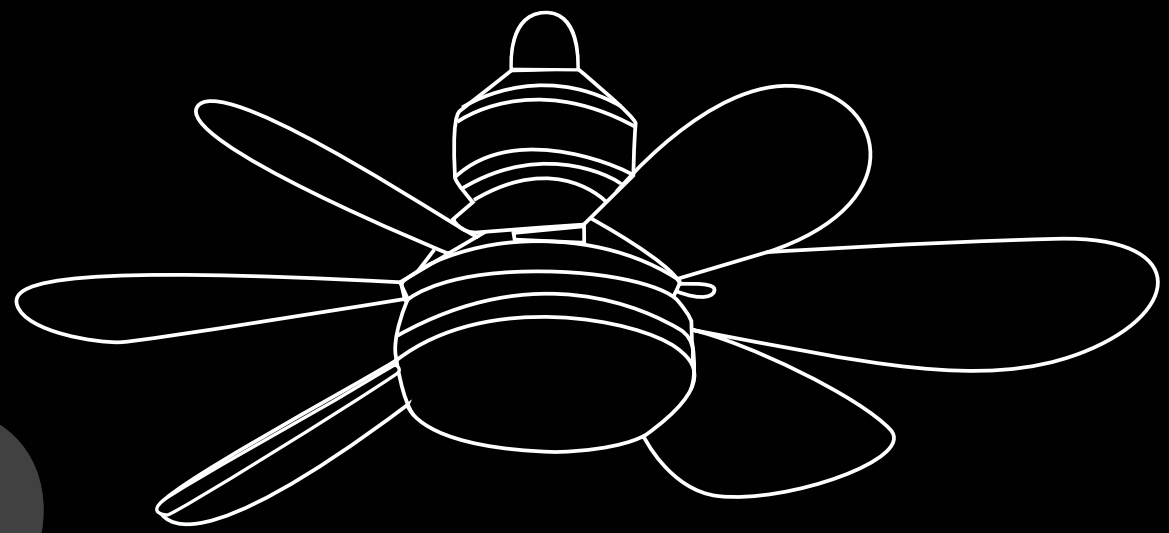


LED FAN LIGHT

PARAIMA

LED Fan Light

Construction Material : Polycarbonate
Body Colour : White

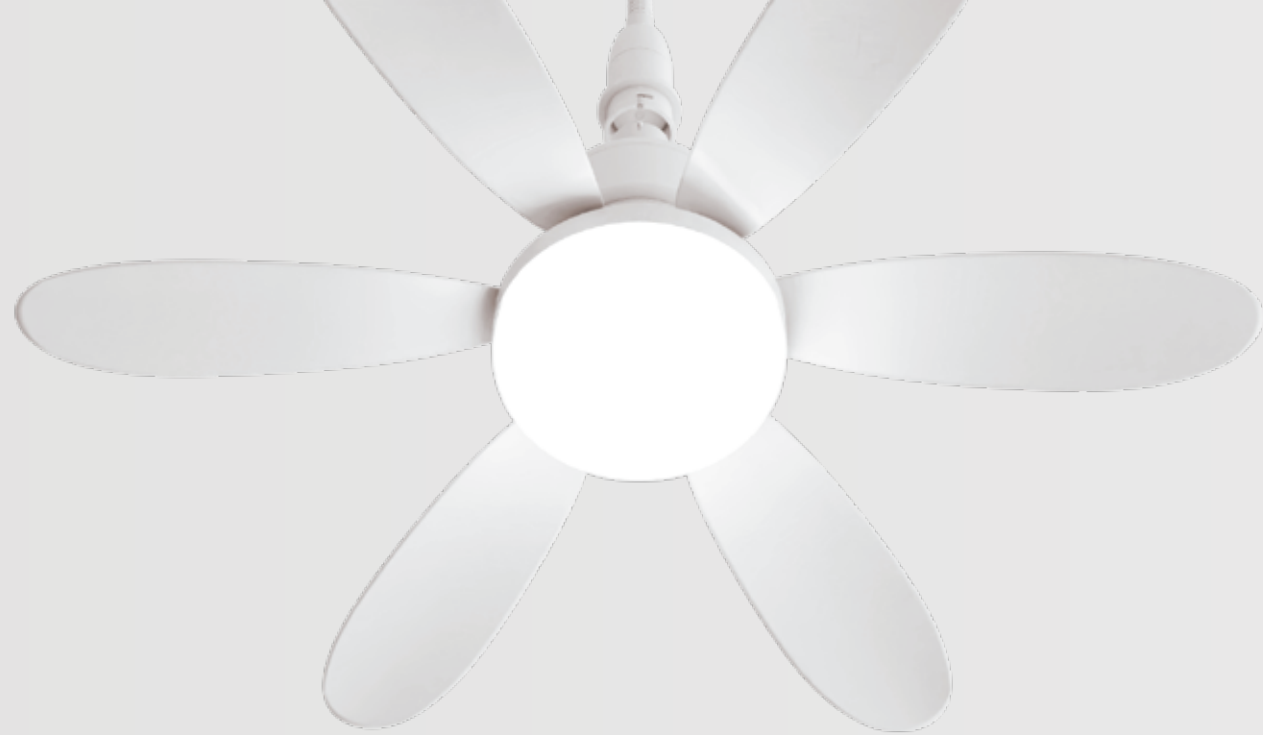

Light Colours :
2.4G (Dimmable & Tuneable)

IP Rating
IP20

CRI
> 90

Surge Protection
2.5 kV

PF
0.9 PF

Lumens/Watt
100 Lm/w

Dimmable & Tuneable
2.4G App & Remote Control



Wattages
40W



Dimensions (mm)
520



Heights (mm)
185

14.



MIRROR LIGHT



Light Colours :

WW  NW  CW 

3 in 1 (WW, NW, CW)



Wattages
10W | 14W | 18W



Length (mm)
310, 410, 546



Wide (mm)
34, 34, 34



Height (mm)
65, 65, 65



SUPRA

LED Mirror Light

Construction Material : Aluminium Die Cast
Body Colour : Grey

PF
0.9 PF

CRI
> 90

Surge Protection
2.5 kV

Lumens/Watt
110 Lm/w


Led Chip
Bridgelux

IP Rating
IP20

Tiltable
Yes

Switch Tuneable
Yes

15.

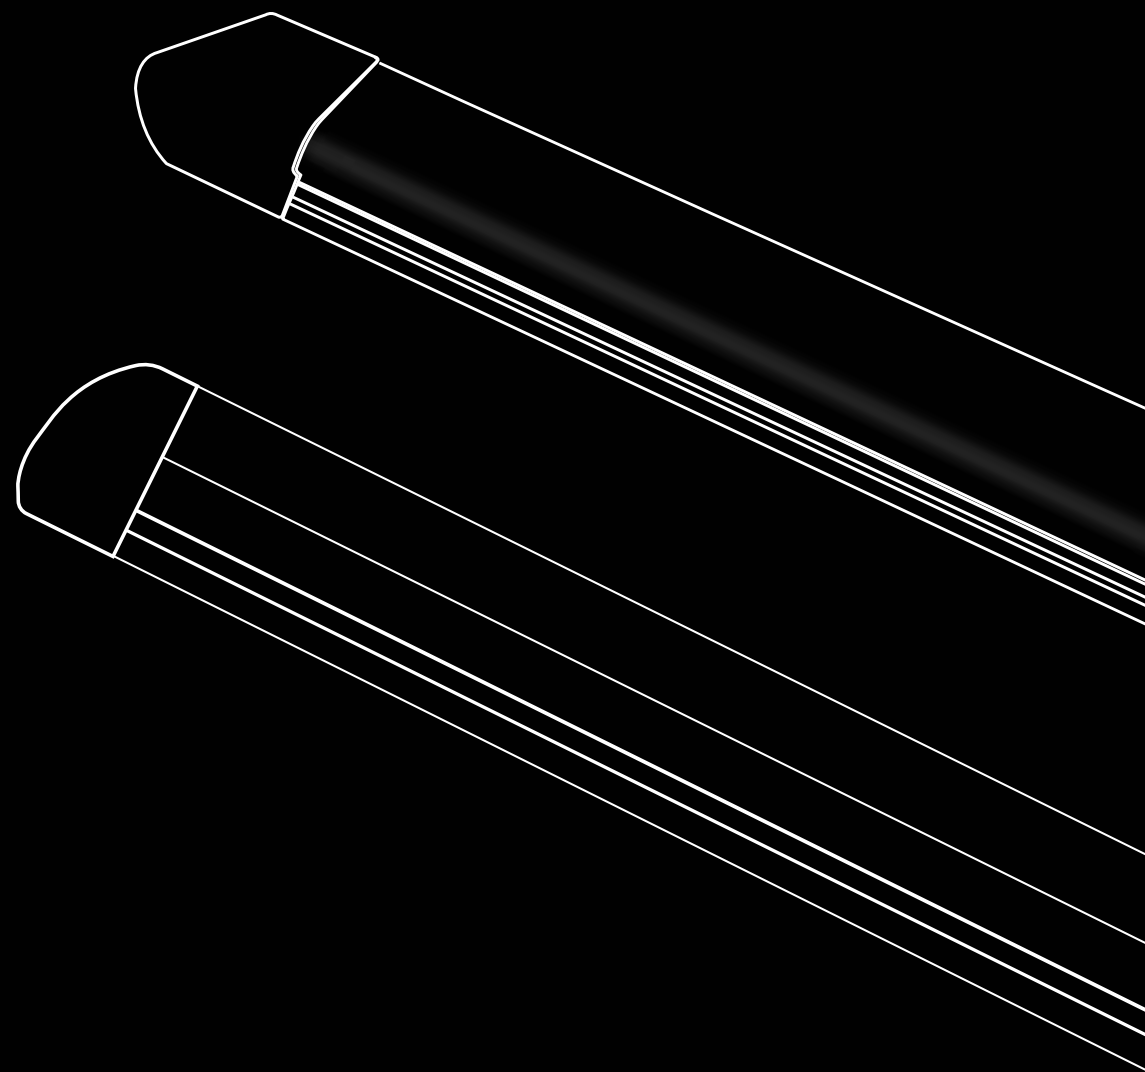

BATTEN LIGHT



ESSENZA

Batten Lights

Construction Material : Polycarbonate & Aluminium Die Cast
Body Colour : White



Wattages | Size (ft)
20W | 36W | 52W | 55W | 72W | 100W
4FT



Length (mm)
1140, 1200, 1200, 1200, 1200, 1200, 1200



Wide (mm)
24, 24, 24, 29, 44, 75, 100



Heights (mm)
24, 24, 24, 34, 28, 27, 26

Light Colours :

WW  NW  CW 

3CCT Switch (WW, NW, CW)

Beam Angle
180 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar



Wattages
8W | 12W | 20W | 24W | 40W
1FT | 2FT | 4FT



Dimensions (mm)
305, 609, 1219, 1219, 1219

Beam Angle
180 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar

ESSENZA+

Batten Light

Construction Material : Polycarbonate
Body Colour : White

Light Colours :

WW 

NW 

CW 



Beam Angle
120 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epistar



Wattages
36W



Dimensions (mm)
1140

VISTA

Batten Light

Construction Material : Polycarbonate
Body Colour : White

Light Colours :

WW 

NW 

CW 



JAFFA

Batten Light

Construction Material : Polycarbonate
Body Colour: White



Light Colours :

CW

Sensor Controlled



Beam Angle
120 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
2.5 kV

IP Rating
IP20

Led Chip
Epsitar



Wattages | Size
24W



Length (mm)
1140



Wide(mm)
25



Heights (mm)
28



NEBULA

Batten Light

Construction Material : Polycarbonate & Aluminium Die Cast
Body Colour : Black



Wattages | Size (ft)
14W | 28W
2FT | 4FT



Length (mm)
609, 1219



Wide (mm)
26, 26



Heights (mm)
29, 29

Light Colours :

3 in 1 (WW, NW, CW)

PF
0.9 PF

CRI
> 90

Surge Protection
2.5 kV

Lumens/Watt
110 Lm/w

Led Chip
Bridgelux


IP Rating
IP20

Tiltable
Yes

Switch Tuneable
Yes



16.

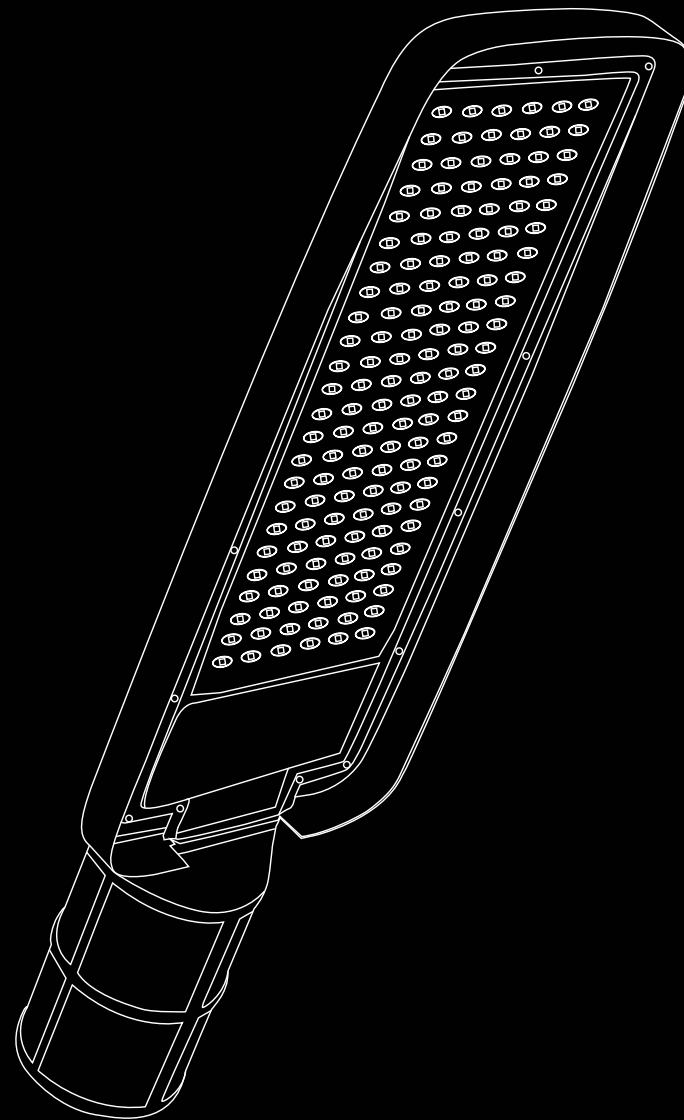

OUTDOOR LIGHT



Light Colours :

3CCT Switch : WW  NW  CW 



Wattages
50W
100W
200W



Dimensions L X W X H (mm)
190 X 130 X 25
239 X 163 X 25
370 X 241 X 25



ESHAA

LED Flood Lights

Construction Material : Aluminium Die Cast + Glass
Body Colour : Black

Beam Angle
120 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
4 kV, 6 kV, 6 kV

IP Rating
IP66



Light Colours :

WW  CW  RGB 



Wattages
30W | 50W | 100W |
150W | 200W | 300W



Dimensions (mm)
245 X 160 X 30mm
280 X 180 X 30mm
355 X 240 X 30mm
357 X 350 X 36mm
357 X 350 X 36mm
420 X 375 X 36mm

OSAKA

LED Flood Light

Construction Material : Aluminum Die Cast + Glass
Body Colour : Grey

Beam Angle
120 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
3 kV, 4 kV, 6 kV

IP Rating
IP66

ZENIA




LED Flood Light

Construction Material : Aluminum Die Cast + Glass
Body Colour : Black



Light Colours :

WW  CW 

Pink  Green  Blue 



PF
0.9 PF

CRI
> 90

Surge Protection
4 kV, 6 kV

Lumens/Watt
110 Lm/w

IP Rating
IP66



Wattages
10W | 150W | 300W



TESSA

LED Street Light

Construction Material : Aluminium Die Cast
Body Colour : Grey

Light Colours :

CW



Wattages
24W | 36W
50W | 100W

Beam Angle
24 Degree

PF
0.9 PF

Surge Protection
2.5 kV

CRI
> 90

Lumens/Watt
110 Lm/w

IP Rating
IP66

Led Chip
Bridgelux



Wattages
30W | 50W
72W | 100W
150W | 200W

PF
0.9 PF

CRI
> 90

Surge Protection
2.5 kV

Lumens/Watt
110 Lm/w

Led Chip
Seoul

IP Rating
IP66

QUBAA

LED Street Light

Construction Material : Aluminium Die Cast
Body Colour : Grey

Light Colours :

CW

XRBIA

LED Street Light

Construction Material : Aluminum Die Cast
Body Colour : Grey




Wattages
20W | 30W
36W | 50W
72W | 100W

Light Colours :

WW 

NW 

CW 

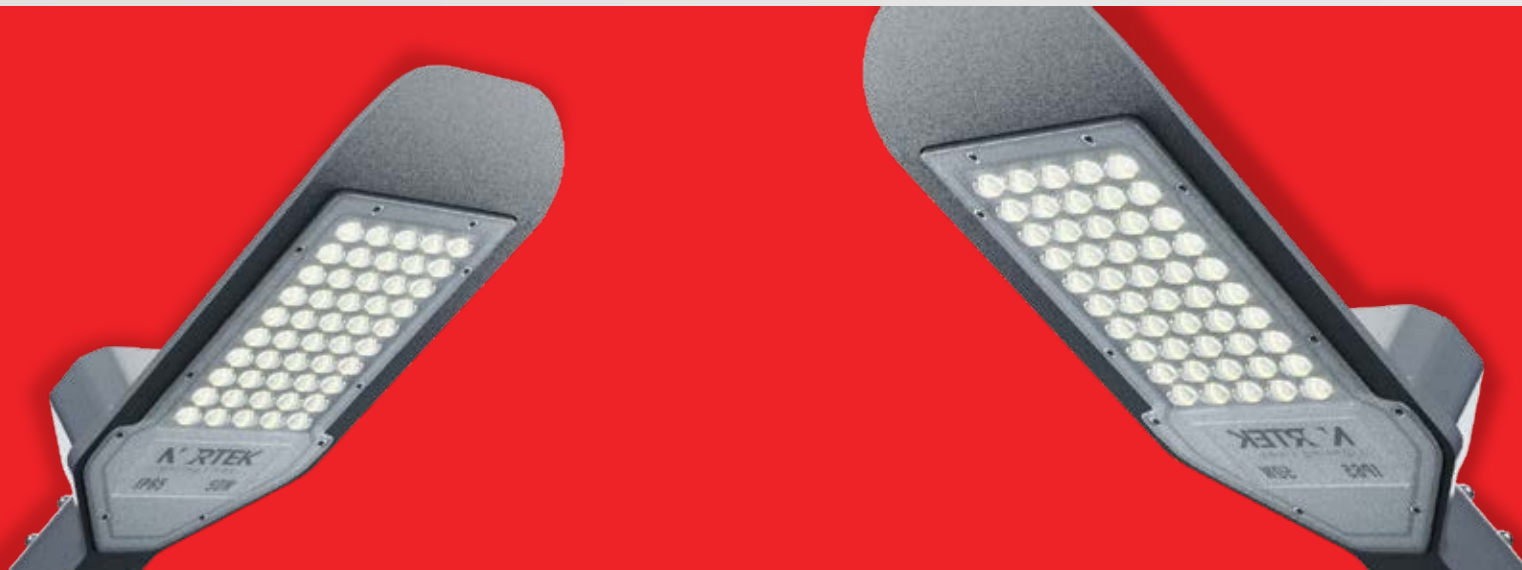

PF
0.9 PF

CRI
> 90

Surge Protection
4 kV, 6 kV

Lumens/Watt
110 Lm/w

IP Rating
IP66

RIVERIA

LED Street Light

Construction Material : Aluminium Die Cast + Glass
Body Colour : Black



Light Colours :

CW



PF
0.9 PF

CRI
> 90

Surge Protection
4 kV, 6 kV


Lumens/Watt
110 Lm/w

IP Rating
IP66



Wattages
20W (12V) | 45W (24V)

TF

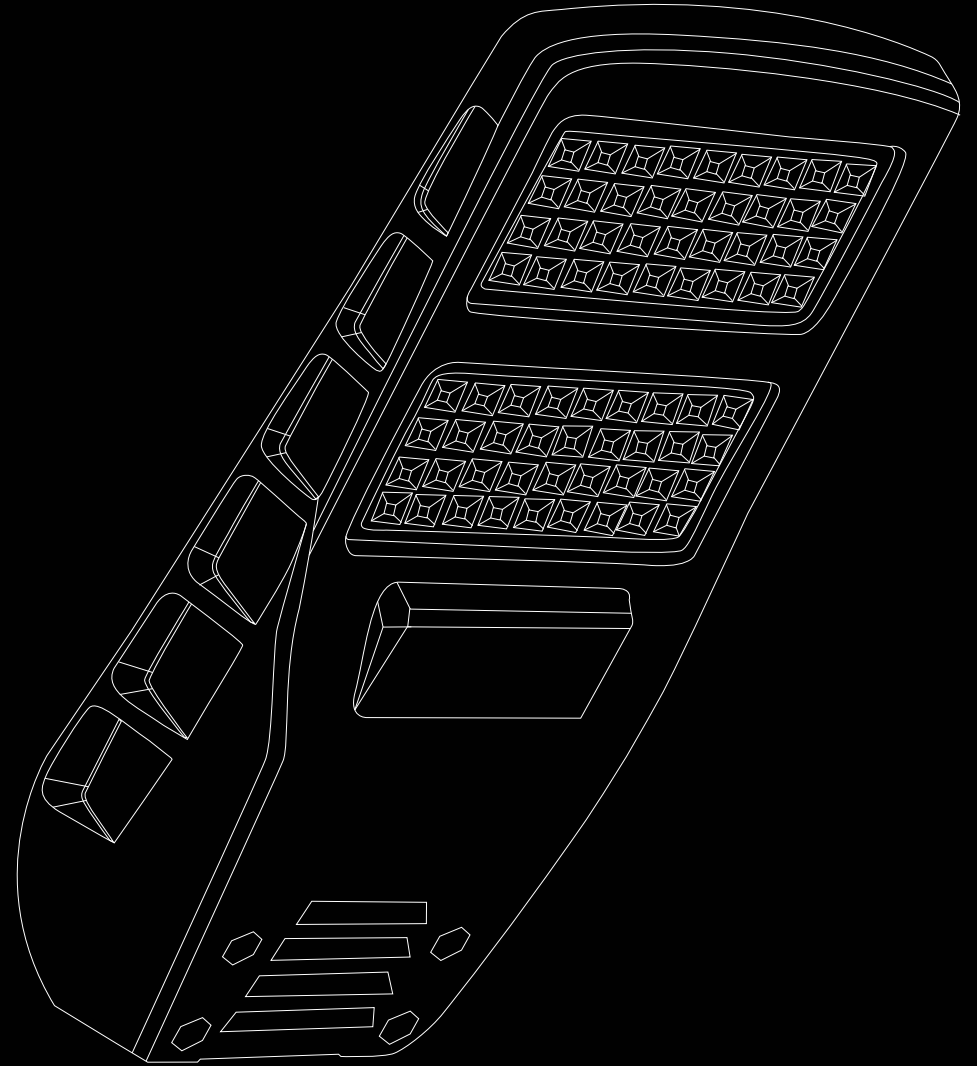


SOLAR LIGHT



STELA

Solar Light

Construction Material : ABS
Body Colour : Black

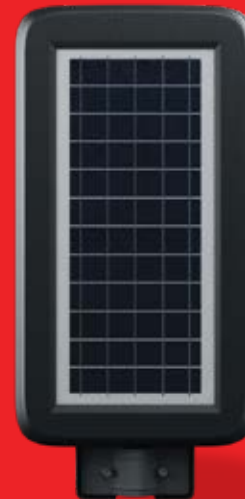

Wattages
40W | 80W

Power Source
Solar

Charge Time
4 - 6 Hrs

Sensor
PIR + Intelligent

Discharge Time
10 - 12 Hrs

IP Rating
IP66

Light Colours :

CW

Battery

3.2V/16.5 AH/3 Batteries

3.2V/22 AH/ 6 Batteries

STELA+

Solar Light

Construction Material : ABS
Body Colour : Black



Light Colours :

CW

Battery

3.2V/18AH (3PCS X 6AH)

3.2V/24AH (4PCS X 6AH)

3.2V/30AH (5PCS X 6AH)



Beam Angle
90 Degree

Charge Time
6 - 9 Hrs

Power Source
Solar

Working Hrs
1 - 2 Days

Sensor
Radar

IP Rating
IP66



Wattage
Lumens

40W
3000/lm

60W
4000/lm

80W
5000/lm

KEA

Solar Light

Construction Material : ABS+PC+GLASS+COPPER
Body Colour : Black




Light Colours :

WW 

Battery
2000mAH

Solar Panel
Microcrystalline 5V/1.5W

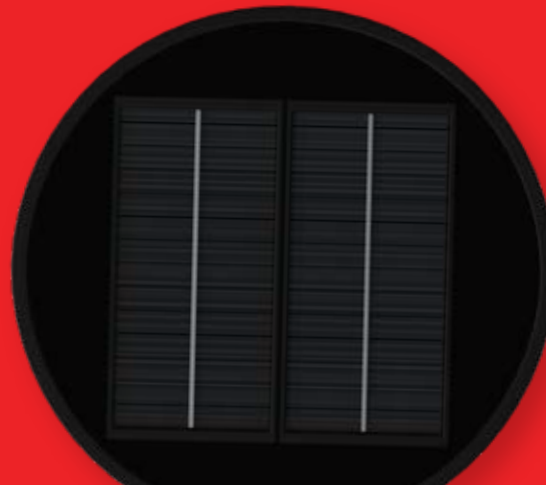

Power Source
Solar

Charge Time
4 - 6 Hrs

Sensor
PIR + Intelligent

Discharge Time
10 - 12 Hrs

IP Rating
IP66

Battery life
10 Hrs

LED
COB 2200K

Light - Sensing Switch
Yes



Wattages
12W

KIAORA

Solar Light

Construction Material : ABS+PC+GLASS+COPPER
Body Colour : Black



Light Colours :
WW 

Battery
1500mAH
Solar Panel
Microcrystalline 5V/1.5W



Wattages
9W

Power Source
Solar

Charge Time
4 - 6 Hrs

Sensor
PIR + Intelligent

Discharge Time
10 - 12 Hrs


IP Rating
IP66

Battery life
10 Hrs

LED
COB 2700K

Light - Sensing Switch
Yes

18.

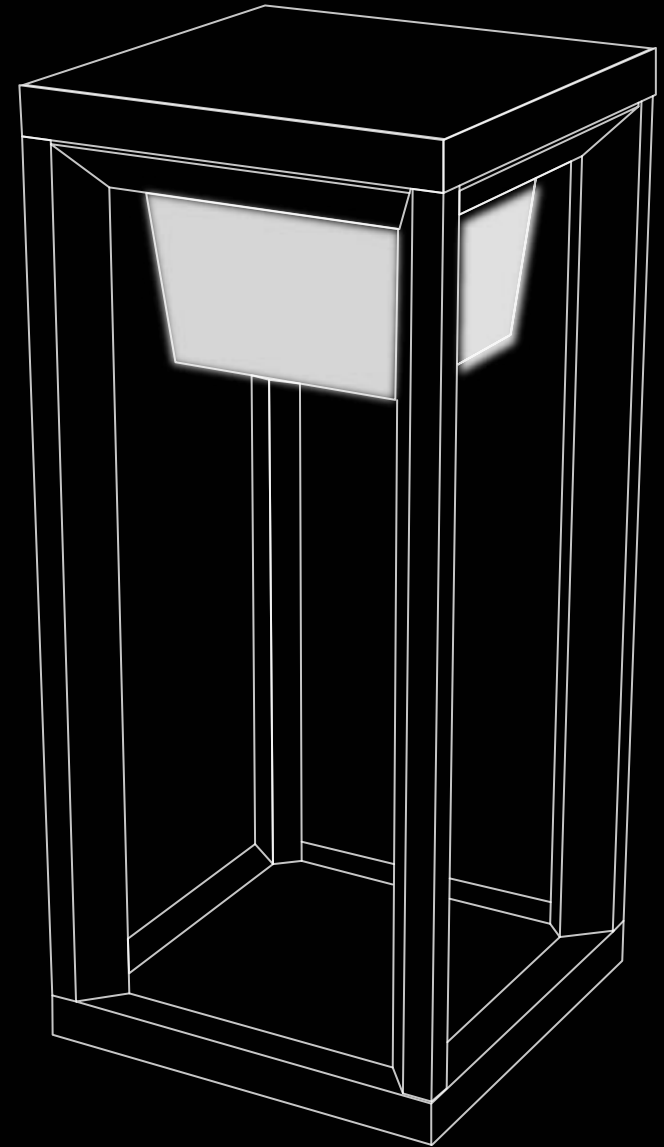

BOLLARD LIGHT



Light Colours :

WW 



Wattages
12W



Dimensions (mm)
140 X 140



Heights (mm)
300, 650, 800

SIARA

Bollard Light

Construction Material : Aluminium Die Cast
Body Colour : Black

PF
0.9 PF

CRI
> 90

Surge Protection
2.5 kV

Lumens/Watt
110 Lm/w

IP Rating
IP66

JARIVA

Bollard Light

Construction Material : Aluminium Die Cast
Body Colour : Grey



Light Colours :

WW 



Wattages
12W



Dimensions (mm)
160 X 54



Heights (mm)
600, 800



PF
0.9 PF

CRI
> 90

Surge Protection
2.5 kV

Lumens/Watt
110 Lm/w

IP Rating
IP66

SIARA+

Bollard Light

Construction Material : Aluminium Die Cast
Body Colour : Black



Light Colours :

WW 



Wattages
12W



Dimensions (mm)
140 X 140



Heights (mm)
230



PF
0.9 PF

CRI
> 90

Surge Protection
2.5 kV


Lumens/Watt
110 Lm/w

IP Rating
IP66

MAMBA

Bollard Light

Construction Material : Aluminium Die Cast
Body Colour : Grey

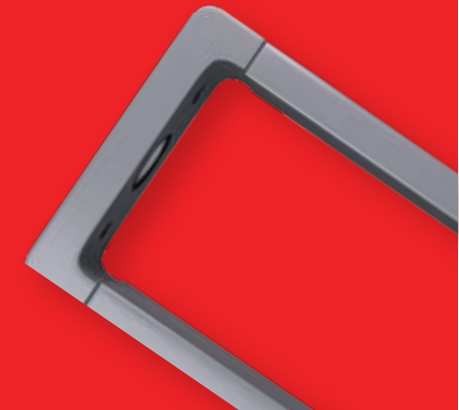

Wattages
12W



Dimensions (mm)
160 X 54



Heights (mm)
250, 600, 800

Light Colours :

WW 

PF
0.9 PF

CRI
> 90

Surge Protection
2.5 kV

Lumens/Watt
110 Lm/w

IP Rating
IP66



TRESA

LED Gate Lamp

Construction Material : Aluminium Die Cast
Body Colour : Black

Light Colours :

WW 



Wattages
E-27



Dimensions LXH (mm)
170 X 170
230 X 230



Height (mm)
210
240



PF
0.9 PF

Surge Protection
2.5 kV

IP Rating
IP66

Lumens/Watt
110 Lm/w

KYMAA

Bollard Light

Construction Material : Aluminium Die Cast
Body Colour : Black



Light Colours :

WW 



Wattages
8W



Base (mm)
94



Heights (mm)
600

PF
0.9 PF

Surge Protection
2.5 kV

Led Chip
Bridgelux

CRI
> 90

Lumens/Watt
110 Lm/w

IP Rating
IP66

19.



WALL LIGHT



LIMCA

Wall Light

Construction Material : Aluminium Die Cast
Body Colour : Black



Wattages
10W | 20W



Size
1 Feet | 2 Feet

Light Colours :

WW 

PF
0.9 PF


Surge Protection
2.5 kV

Led Chip
CREE

IP Rating
IP66

Lumens/Watt
110 Lm/w

CRI
> 90

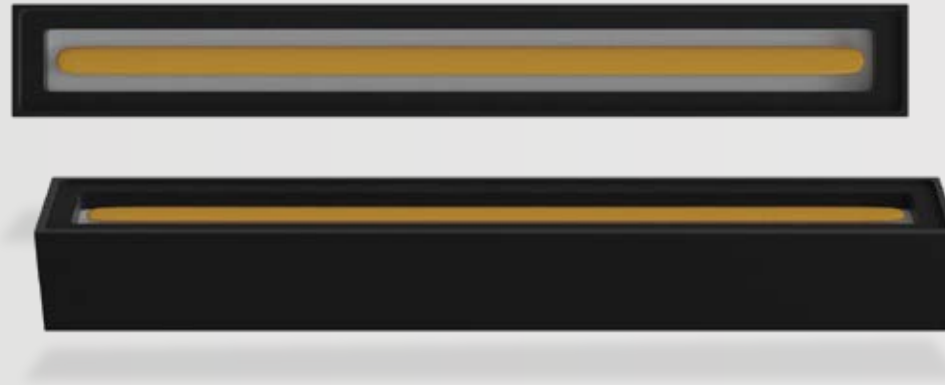

HANINA

Wall Light

Construction Material : Aluminum Die Cast + Glass
Body Colour : Black

PF
0.9 PF

Surge Protection
2.5 kV

Led
COB Strip

IP Rating
IP66

Lumens/Watt
110 Lm/w

CRI
> 90



Wattages
6W | 10W



Size (mm)
145, 205



Height (mm)
25, 25



Light Colours :

WW 



Light Colours :

WW 



Wattages
4W | 8W | 12W



Dimensions LXH (mm)
95 X 20
200 X 20
290 X 20



Height (mm)
35, 35, 35

PF
0.9 PF

Surge Protection
2.5 kV

Led Chip
CREE

IP Rating
IP66

Lumens/Watt
110 Lm/w

CRI
> 90

KAAMA

Wall Light

Construction Material : Aluminium Die Cast
Body Colour : Black





SHIKA

Wall Light

Construction Material : Aluminium Die Cast
Body Colour : Grey & White



Wattages
1W | 2W



Dimensions (mm)
35, 35



Heights (mm)
50, 35

Light Colours :

WW 



PF
0.9 PF

IP Rating
IP66

Surge Protection
2.5 kV

Lumens/Watt
110 Lm/w

Led Chip
CREE

CRI
> 90



COREA


Wall Light

Construction Material : Aluminium Die Cast
Body Colour : Grey

Light Colours :

WW 

 Wattages
2W | 3W | 4W

 Dimensions (mm)
70, 49, 30

 Height (mm)
25, 30, 50

PF
0.9 PF

Surge Protection
2.5 kV


Led Chip
CREE

IP Rating
IP66

Lumens/Watt
110 Lm/w

CRI
> 90



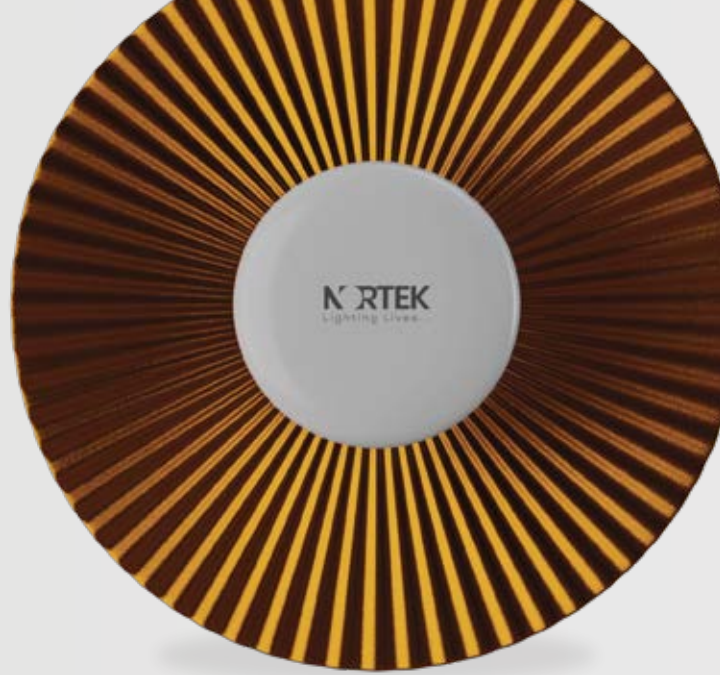

DONINA

Wall Light

Construction Material : Ceramic
Body Colour : Golden



Wattages
12W



Dimensions (mm)
155



Heights (mm)
20



Cutouts (mm)
82

Light Colours :

WW 



PF
0.9 PF

IP Rating
IP66

Surge Protection
2.5 kV

Lumens/Watt
110 Lm/w

Led Chip
CREE

CRI
> 90

VENEZIA

Wall Light

Construction Material : Polycarbonate
Body Colour : White



Light Colours :

WW 



Beam Angle
120 Degree

CRI
> 90

PF
0.9 PF


Lumens/Watt
110 Lm/w


Surge Protection
2.5 kV


IP Rating
IP66

Led Chip
Epistar

 Wattages | Size
8W | 10W | 20W

 Length (mm)
168, 171, 212

 Wide(mm)
68, 70, 100

 Heights (mm)
45, 49, 60

VENEZIA+

Wall Light

Construction Material : Aluminium Die Cast
Body Colour : Grey



Light Colours :

WW 



PF
0.9 PF

IP Rating
IP66

Surge Protection
2.5 kV

Lumens/Watt
110 Lm/w

Led Chip
CREE

CRI
> 90



Wattages
2W | 4W




Dimensions (mm)
20, 40



Heights (mm)
40, 50

20.

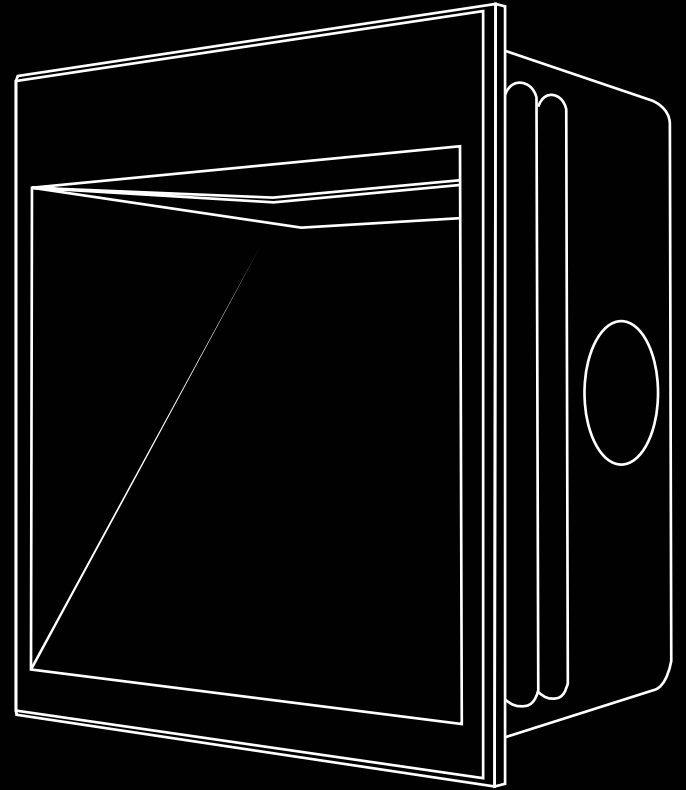

LED FOOT LIGHT



ORINA

LED Foot Light

Construction Material : Aluminium Die Cast
Body Colour : White & Black



Wattages
3W



Dimensions (mm)
85 X 85



Height (mm)
51

Light Colours :

WW 



PF
0.9 PF

CRI
> 90

Surge Protection
2.5 kV

Lumens/Watt
110 Lm/w

Led Chip
Epistar

IP Rating
IP66



Wattages
3W



Dimensions L X W (mm)
45 X 45



Height (mm)
50

PF
0.9 PF

CRI
> 90

Surge Protection
2.5 kV

Lumens/Watt
110 Lm/w

Led Chip
Epistar

IP Rating
IP66

SENSA


LED Foot Light

Construction Material : Aluminium Die Cast
Body Colour : Black

Light Colours :

WW 

21.

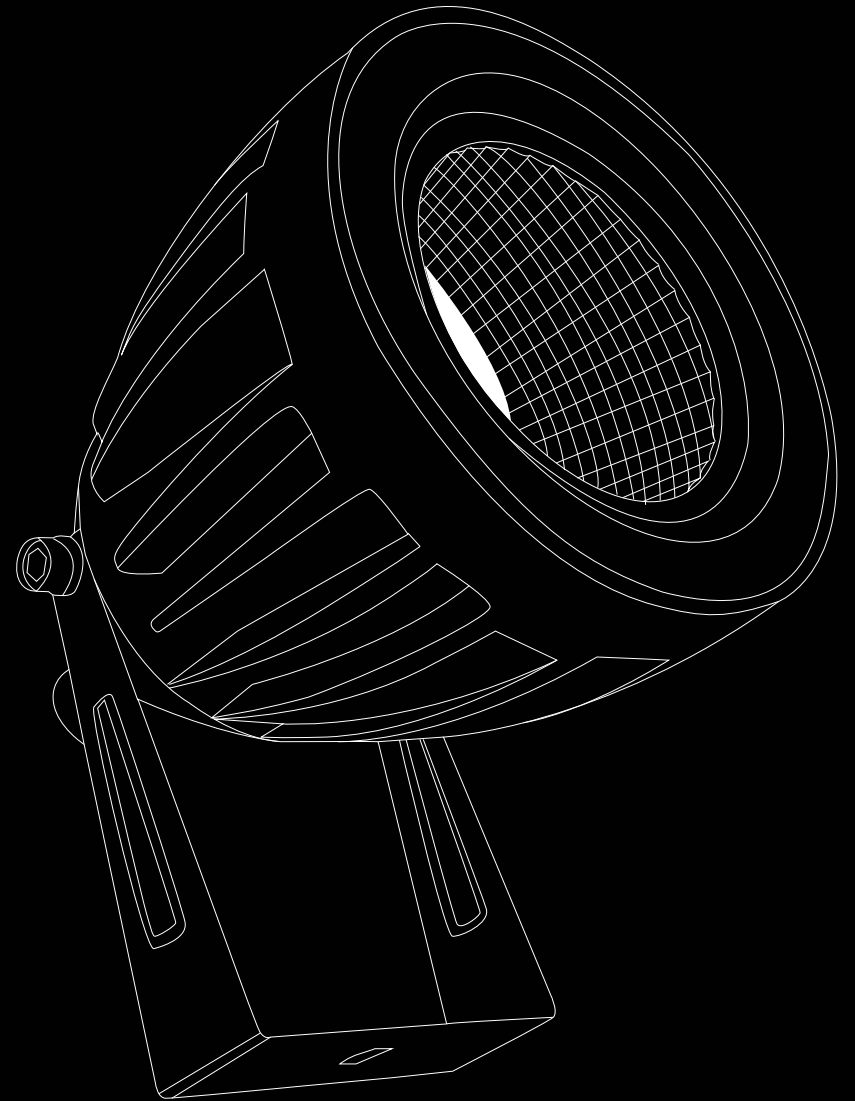

GARDEN LIGHT

SHAINAYA

Garden Light

Construction Material : Aluminium Die Cast
Body Colour : Black



PF
0.9 PF

CRI
> 9t0

Surge Protection
2.5 kV

Lumens/Watt
110 Lm/w

IP Rating
IP66



Wattages
7W | 12W



Dimensions (mm)
62




Heights (mm)
100



Light Colours :

WW 

Green 

Shape : Round






HYDRA




Garden light

Construction Material : Aluminium Die Cast
Body Colour : Black

Light Colours :

WW  NW  CW 

Red  Green  Blue 

Pink  Amber  IB 



Wattages
5W | 12W



Dimensions (mm)
75, 75



PF
0.9 PF

Surge Protection
2.5 kV

IP Rating
IP66

CRI
> 90

Lumens/Watt
110 Lm/w




FEISTA

Garden Light

Construction Material : Aluminium Die Cast
Body Colour : Black



Light Colours :

RGB 



Wattages
12W



Dimensions (mm)
60



Heights (mm)
80

PF
0.9 PF


CRI
> 90

Surge Protection
2.5 kV

Lumens/Watt
110 Lm/w

IP Rating
IP66

22

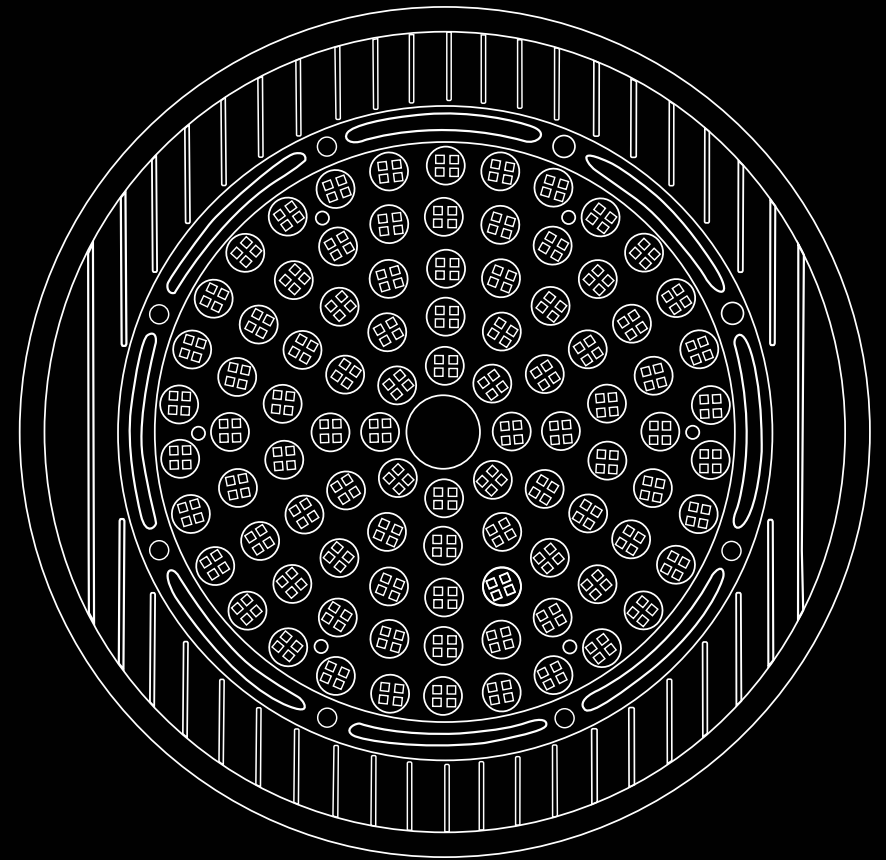

HI-BAY LIGHT

SIGMA

High Bay Light

Construction Material : Aluminium Die Cast
Body Colour : Black



Light Colours :

CW



PF
0.9 PF

CRI
> 90

Surge Protection
4 kV, 6 kV

Lumens/Watt
110 Lm/w

IP Rating
IP66



Wattages
150W | 200W



Wattages
100W
150W
200W
300W

QUORA

LED HI-BAY LIGHT

Construction Material : Aluminium Die Cast
Body Colour : Grey

Beam Angle
90 Degree

CRI
> 90

PF
0.9 PF

Lumens/Watt
110 Lm/w

Surge Protection
6 kV



IP Rating
IP66





Light Colours :

CW



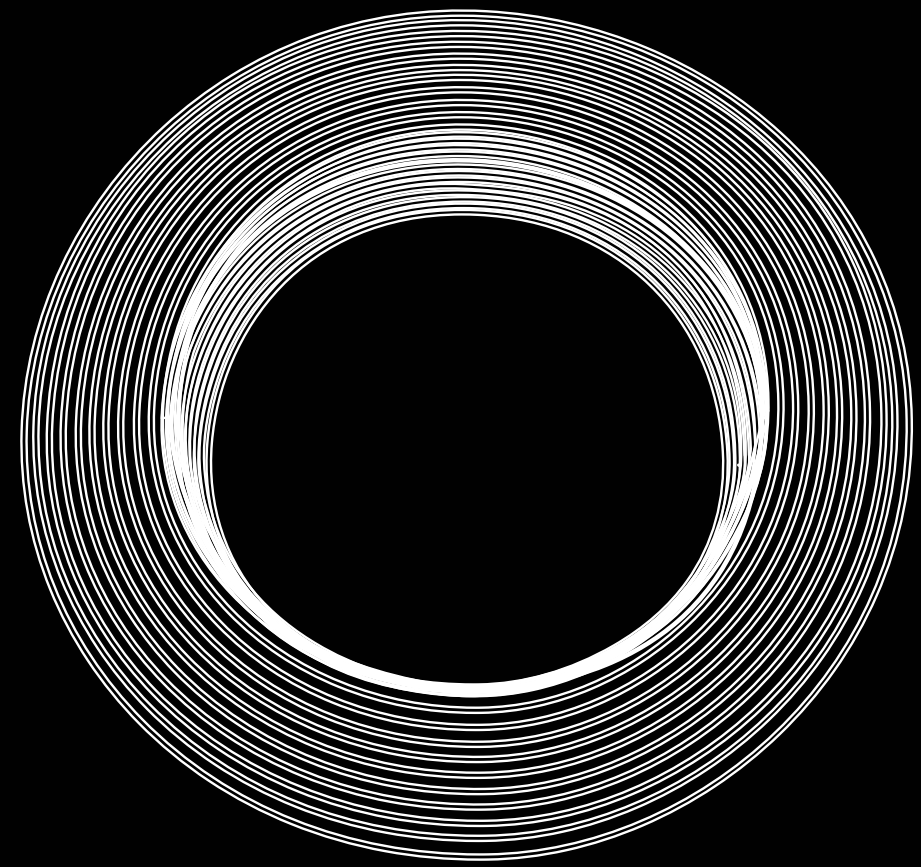

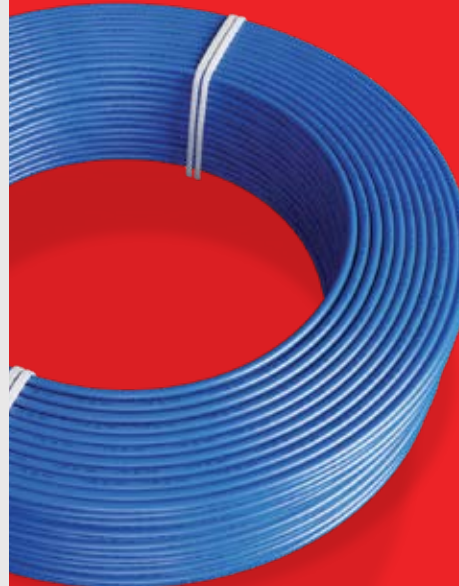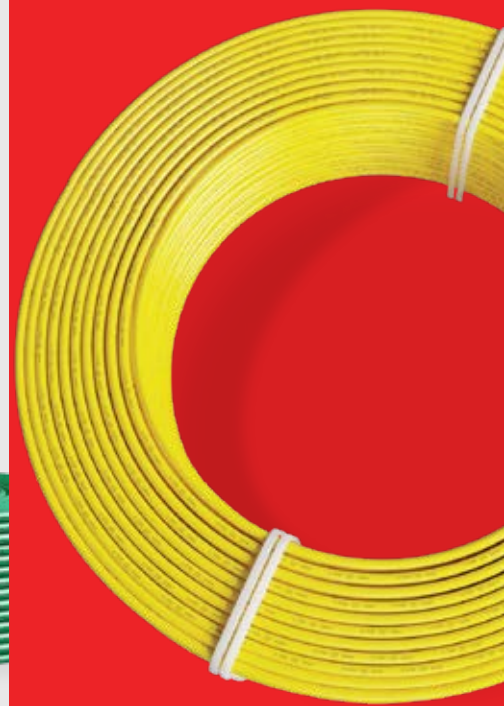

23.



WIRES & CABLES



Colours :

Red  Green  Blue 
Yellow  Black  Grey 
White 



Sizes (Sq mm)

0.75 | 1.00 | 1.50 | 2.50 | 4.00 | 6.00 | 10.00

Nominal Area of Conductor

1

Leakage Current

0.009 AMPS

SAMARA

Wires and Cables

Material : Copper

Grade : 99.97% Hi Purity Electrolytic Grade Copper

Wire Length : 90 MTR, 200MTR & 300 MTR

Type FR-LSH-LF Voltage 1100V

Core Single Class 5

PVC Coating Double Layer Protection

Compliance ROHS & Reach Compliant



Sizes (Sq mm)

0.75 | 1.00 | 1.50 | 2.50 | 4.00 | 6.00 | 10.00

Nominal Area of Conductor

1

Leakage Current

0.009 AMPS

Type

HR-FR-LSH-LF

Voltage

1100V

Core

Single

Class

2

PVC Coating




Triple Layer Protection




Compliance


ROHS & Reach Compliant


VAYA
Wires and Cables

Colours :

Red  Green  Blue 

Yellow  Black  Grey 

White 

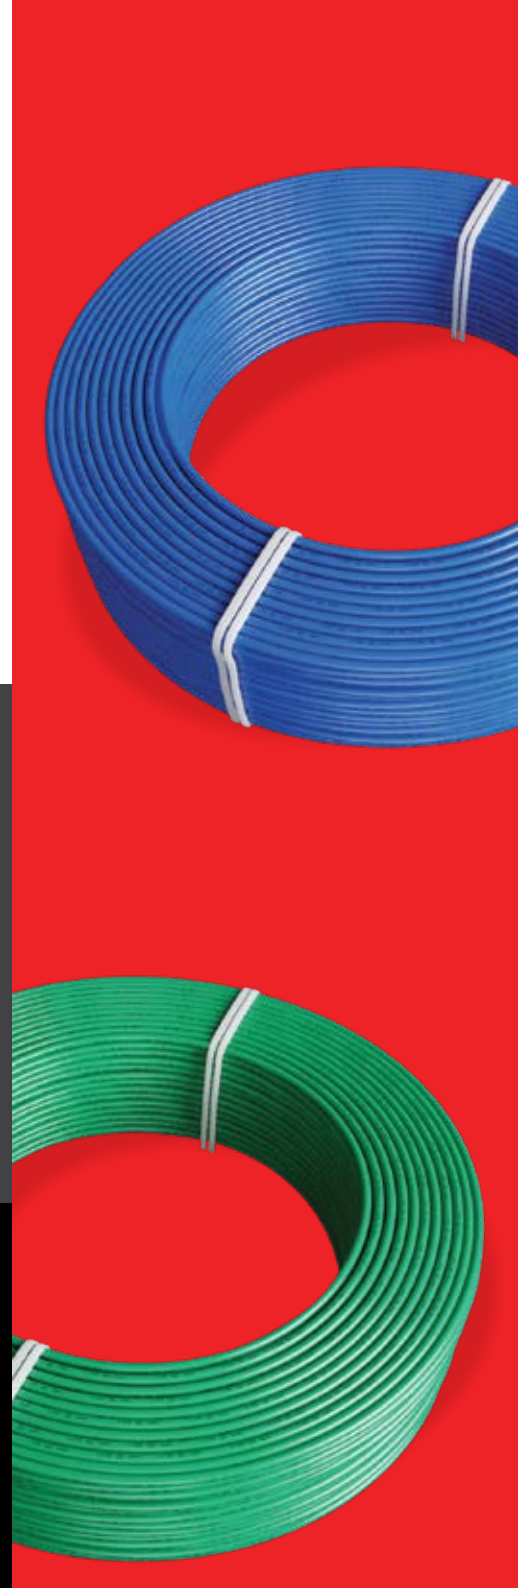



Colour :

Black



Sizes (Sq mm)

0.75 | 1.00 | 1.50 |
2.50 | 4.00 | 6.00



Core

2C | 3C | 4C



RASHA

Wires and Cables

Material : Copper

Grade : 99.97% Hi Purity Electrolytic Grade Copper

Cable Length : 100 MTR

Type
FR-LSH-LF


Voltage
1100V

Class
5

Core
Multi

PVC Coating
Triple Layer Protection

Compliance
ROHS & Reach Compliant

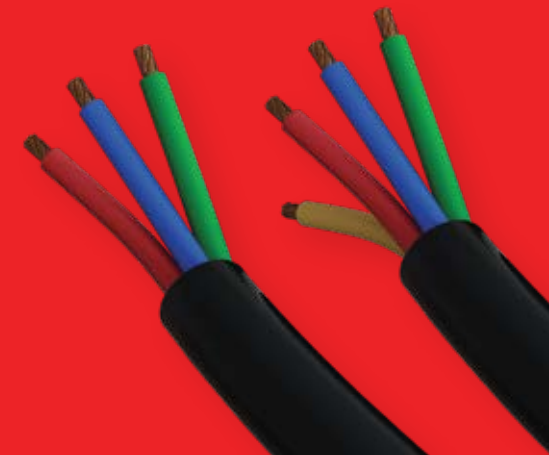



Colours :

Red  Green 

Yellow  Blue 

White  Black 



TARASHA

PVC Tape

Size : 6m | 15m

Flammability : Self Extinguishing




Insulation Resistance : 10(5) Mega ohms (min)



NORTEK
Lighting Lives...

Scan to view our
**E-PRODUCT
CATALOGUE**



www.nortekled.com | info@nortekled.com | 022-40144321 |    / nortek_lighting_lives

Scan to view our
**EXPERIENCE
CENTRE**



Dynamic Lighting Solutions LLP

205, Udyog Mandir No 1, 7-C, Pitamber Lane,
Mahim West, Mumbai, Maharashtra-400016.